Avaya 1230E IP Deskphone with SIP Software on Avaya Aura® User Guide

Release 4.4
16-604277
Issue 01.01 Standard
November 2013

© 2013 Avaya Inc.

All Rights Reserved.

Notice

While reasonable efforts have been made to ensure that the information in this document is complete and accurate at the time of printing, Avaya assumes no liability for any errors. Avaya reserves the right to make changes and corrections to the information in this document without the obligation to notify any person or organization of such changes.

Documentation disclaimer

“Documentation” means information published by Avaya in varying mediums which may include product information, operating instructions and performance specifications that Avaya generally makes available to users of its products. Documentation does not include marketing materials. Avaya shall not be responsible for any modifications, additions, or deletions to the original published version of documentation unless such modifications, additions, or deletions were performed by Avaya. End User agrees to indemnify and hold harmless Avaya, Avaya's agents, servants and employees against all claims, lawsuits, demands and judgments arising out of, or in connection with, subsequent modifications, additions or deletions to this documentation, to the extent made by End User.

Link disclaimer

Avaya is not responsible for the contents or reliability of any linked websites referenced within this site or documentation provided by Avaya. Avaya is not responsible for the accuracy of any information, statement or content provided on these sites and does not necessarily endorse the products, services, or information described or offered within them. Avaya does not guarantee that these links will work all the time and has no control over the availability of the linked pages.

Warranty

Avaya provides a limited warranty on its hardware and Software (“Product(s)”). Refer to your sales agreement to establish the terms of the limited warranty. In addition, Avaya’s standard warranty language, as well as information regarding support for this Product while under warranty is available to Avaya customers and other parties through the Avaya Support website: http://support.avaya.com. Please note that if you acquired the Product(s) from an authorized Avaya Channel Partner outside of the United States and Canada, the warranty is provided to you by said Avaya Channel Partner and not by Avaya. “Software” means computer programs in object code, provided by Avaya or an Avaya Channel Partner, whether as stand-alone products or pre-installed on hardware products, and any upgrades, updates, bug fixes, or modified versions.

Licenses

THE SOFTWARE LICENSE TERMS AVAILABLE ON THE AVAYA WEBSITE, HTTP://SUPPORT.AVAYA.COM/LICENSEINFO ARE APPLICABLE TO ANYONE WHO DOWNLOADS, USES AND/OR INSTALLS AVAYA SOFTWARE, PURCHASED FROM AVAYA INC., ANY AVAYA AFFILIATE, OR AN AUTHORIZED AVAYA CHANNEL PARTNER (AS APPLICABLE) UNDER A COMMERCIAL AGREEMENT WITH AVAYA OR AN AUTHORIZED AVAYA CHANNEL PARTNER. UNLESS OTHERWISE AGREED TO BY AVAYA IN WRITING, AVAYA DOES NOT EXTEND THIS LICENSE IF THE SOFTWARE WAS OBTAINED FROM ANYONE OTHER THAN AVAYA, AN AVAYA AFFILIATE OR AN AVAYA AUTHORIZED AVAYA CHANNEL PARTNER; AVAYA RESERVES THE RIGHT TO TAKE LEGAL ACTION AGAINST YOU AND ANYONE ELSE USING OR SELLING THE SOFTWARE WITHOUT A LICENSE. BY INSTALLING, DOWNLOADING OR USING THE SOFTWARE, OR AUTHORIZING OTHERS TO DO SO, YOU, ON BEHALF OF YOURSELF AND THE ENTITY FOR WHOM YOU ARE INSTALLING, DOWNLOADING OR USING THE SOFTWARE (HEREINAFTER REFERRED TO INTERCHANGEABLY AS “YOU” AND “END USER”), AGREE TO THESE TERMS AND CONDITIONS AND CREATE A BINDING CONTRACT BETWEEN YOU AND AVAYA INC. OR THE APPLICABLE AVAYA AFFILIATE (“AVAYA”).

Heritage Nortel Software

“Heritage Nortel Software” means the software that was acquired by Avaya as part of its purchase of the Nortel Enterprise Solutions Business in December 2009. The Heritage Nortel Software currently available for license from Avaya is the software contained within the list of Heritage Nortel Products located at http://support.avaya.com/LicenseInfo under the link “Heritage Nortel Products”. For Heritage Nortel Software, Avaya grants Customer a license to use Heritage Nortel Software provided hereunder solely to the extent of the authorized activation or authorized usage level, solely for the purpose specified in the Documentation, and solely as embedded in, for execution on, or (in the event the applicable Documentation permits installation on non-Avaya equipment) for communication with Avaya equipment. Charges for Heritage Nortel Software may be based on extent of activation or use authorized as specified in an order or invoice.

Copyright

Except where expressly stated otherwise, no use should be made of materials on this site, the Documentation, Software, or hardware provided by Avaya. All content on this site, the documentation and the Product provided by Avaya including the selection, arrangement and design of the content is owned either by Avaya or its licensors and is protected by copyright and other intellectual property laws including the sui generis rights relating to the protection of databases. You may not modify, copy, reproduce, republish, upload, post, transmit or distribute in any way any content, in whole or in part, including any code and software unless expressly authorized by Avaya. Unauthorized reproduction, transmission, dissemination, storage, and or use without the express written consent of Avaya can be a criminal, as well as a civil offense under the applicable law.

Third Party Components

“Third Party Components” mean certain software programs or portions thereof included in the Software that may contain software (including open source software) distributed under third party agreements (“Third Party Components”), which contain terms regarding the rights to use certain portions of the Software (“Third Party Terms”). Information regarding distributed Linux OS source code (for those Products that have distributed Linux OS source code) and identifying the copyright holders of the Third Party Components and the Third Party Terms that apply is available in the Documentation or on Avaya’s website at: http://support.avaya.com/Copyright. You agree to the Third Party Terms for any such Third Party Components.

Note to Service Provider

The Product may use Third Party Components that have Third Party Terms that do not allow hosting and may need to be independently licensed for such purpose.

Preventing Toll Fraud

“Toll Fraud” is the unauthorized use of your telecommunications system by an unauthorized party (for example, a person who is not a corporate employee, agent, subcontractor, or is not working on your company's behalf). Be aware that there can be a risk of Toll Fraud associated with your system and that, if Toll Fraud occurs, it can result in substantial additional charges for your telecommunications services.

Avaya Toll Fraud intervention

If you suspect that you are being victimized by Toll Fraud and you need technical assistance or support, call Technical Service Center Toll Fraud Intervention Hotline at +1-800-643-2353 for the United States and Canada. For additional support telephone numbers, see the Avaya Support website: http://support.avaya.com. Suspected security vulnerabilities with Avaya products should be reported to Avaya by sending mail to: securityalerts@avaya.com.

Trademarks

The trademarks, logos and service marks (“Marks”) displayed in this site, the Documentation and Product(s) provided by Avaya are the registered or unregistered Marks of Avaya, its affiliates, or other third parties. Users are not permitted to use such Marks without prior written consent from Avaya or such third party which may own the Mark. Nothing contained in this site, the Documentation and Product(s) should be construed as granting, by implication, estoppel, or otherwise, any license or right in and to the Marks without the express written permission of Avaya or the applicable third party.

Avaya is a registered trademark of Avaya Inc.

All non-Avaya trademarks are the property of their respective owners. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.

Downloading Documentation

For the most current versions of Documentation, see the Avaya Support website: http://support.avaya.com.

Contact Avaya Support

See the Avaya Support website: http://support.avaya.com for product notices and articles, or to report a problem with your Avaya product. For a list of support telephone numbers and contact addresses, go to the Avaya Support website: http://support.avaya.com, scroll to the bottom of the page, and select Contact Avaya Support.

Contents

Chapter 1: Revision history 11
Chapter 2: Regulatory and safety information 13
Chapter 3: Introduction to the Avaya 1230 IP Deskphone 17
Basic features 17
IP Deskphone controls 18
Key press behavior 21
Avaya 1230 IP Deskphone display 22
Cleaning the Avaya 1230 IP Deskphone LCD display screen 23
Context-sensitive soft keys 23
Idle display screen after dial pad input 27
In-call context-sensitive soft keys 28
Navigation keys 31
Visual indicators 32
Display screen icons 32
Visual Alerter/Message Waiting Indicators 34
Available IP Deskphone call features 35
Security features 35
Secure connection 35
Chapter 4: Installing the 1230 IP Deskphone 37
Before you begin 37
Connecting the components 37
Attaching the foot stand (optional) 38
Connecting the handset 39
Connecting the headset (optional) 39
Connecting the AC power adapter (optional) 39
Connecting the LAN ethernet cable 40
Connecting the PC Ethernet cable 40
Entering text 41
Using the dialpad 41
Chapter 5: Accessing the Avaya 1230 IP Deskphone 45
Logging on 45
Automatic login 46
Configuring the domain 46
Password protection for domains 47
Selecting a language 47
Logging on to your Avaya IP Deskphone 48
Configuring the duration of the login 49
Logging on multiple user accounts 49
Timed logoff 50
Timed logoff while IP Deskphone is idle 50
Timed logoff while on a call 50
Selecting a location 51
User Profile 51
Confirmation logon screen 52

Logging off from the IP Deskphone ... 52
Logging off multiple user accounts ... 53
Making an emergency call ... 53
Location information ... 54
Chapter 6: Configuring the Avaya 1230 IP Deskphone ... 55
Adjusting the display screen contrast ... 55
Creating the idle screen text display ... 55
Configuring Menu Auto back-out ... 56
Selecting a ring pattern ... 57
Adjusting the volume ... 57
Adjusting the ring volume ... 58
Adjusting the volume of the Handset, Headset, and Handsfree mode ... 58
Adjusting the paging ring volume ... 60
Selecting a language ... 60
Selecting the date and time format ... 61
Chapter 7: Making a call ... 63
Making a call using off-hook dialing ... 63
Making a call using on-hook dialing ... 64
Using handsfree calling ... 65
Using Call Subjects ... 66
Managing Call Subjects ... 67
Adding a Call Subject ... 67
Deleting a Call Subject ... 68
Editing a Call Subject ... 68
Chapter 8: Receiving a call ... 71
Caller identification ... 71
Answering an incoming call ... 71
Redirecting an incoming call ... 72
Ignoring an incoming call ... 73
Chapter 9: The Address Book ... 75
Viewing the Address Book ... 75
Initiating a call from the Address Book ... 75
Adding a contact to your Address Book ... 76
Editing a contact in your Address Book ... 77
Copying information to the Address Book ... 78
Searching for a contact in the Address Book ... 79
Using the Search feature in the Address Book ... 80
Chapter 10: Call Inbox ... 85
Accessing the Call Inbox ... 85
Managing calls in the Call Inbox while not on a call ... 85
Viewing the details of a call in the Call Inbox ... 86
Managing missed calls ... 87
Missed Calls Notification ... 88
Initiating a call from the Call Inbox ... 88
Deleting calls in your Call Inbox ... 89
Accessing the calls in your Call Inbox during a call ... 90
Chapter 11: Instant Messaging ... 91

Configuring Instant Messaging ... 91
Instant Message automatic pop-ups ... 91
Configuring IM audible alert ... 92
Composing an Instant Message ... 92
Instant Message Inbox/Outbox ... 93
Accessing Instant Messages ... 94
Viewing the content of an Instant Message ... 94
Replying to an Instant Message ... 95
Initiating a call from an Instant Message ... 95
Deleting an Instant Message ... 96
Chapter 12: Active calls and call features ... 97
Making a new call ... 97
Ring Again Busy / Automatic Callback ... 98
Whisper Page ... 98
Call Waiting ... 99
Placing a call on Hold ... 99
Multiple calls On Hold ... 100
Using 3-way calling ... 103
Ad hoc conferencing when connecting to the Call Server ... 104
Transferring a call ... 105
Using Park Call ... 106
Using the Friends feature ... 107
Accessing your Friends list ... 108
Editing information of a friend ... 109
Feature keys ... 110
Feature key programming ... 111
Remove a programmed feature key ... 116
Feature key autoprogramming ... 116
Using Call Forward ... 120
Configuring Do Not Disturb ... 122
Configuring a Presence state ... 123
Adding a new Presence state message ... 125
Audio Codecs ... 125
Audio Codec Selection ... 126
Audio Codec Ordering ... 126
PC Client softphone interworking with the IP Deskphone ... 126
Automatic remote software updates ... 127
Busy Lamp Field ... 128
Chapter 13: Advanced features ... 129
Viewing the IP Deskphone information ... 129
Accessing the Services menu ... 130
Checking for Updates ... 130
Resetting the IP Deskphone ... 131
Erasing the user data ... 132
Network menu ... 134
Customizable banner for login ... 135
Phone Information - Details screen ... 135

Screensaver/screen lock ... 136
Service Package Group Support ... 139
Bulk-create feature keys based on an existing directory Address Book group ... 140
View existing groups in your Address Book if you selected Groups ... 141
View the existing groups you have in your Address Book ... 141
Add a new contact to your Address Book ... 142
Add a new group ... 143
Speed Dial List ... 144
Speed Dial List screen ... 145
Auto-Retrieve flag ... 145
File Manager ... 146
Abbreviated Dialing Lists ... 146
Announcement Record / Listen ... 147
Change Class of Restriction ... 147
Change Coverage ... 147
EC500 Self Administration ... 148
Malicious Call Trace Activation ... 148
Station Lock and Unlock ... 149
Group Call Pickup ... 149
Chapter 14: Multiuser ... 151
Initial login ... 151
Additional logins ... 151
Automatic login ... 152
Logging out ... 152
Primary account logout ... 152
Secondary account logout ... 153
Server failover ... 153
Cable unplugged ... 153
Upgrade impacts to user profiles ... 154
Line keys ... 154
Making a call ... 155
Receiving a call ... 156
Being in a call ... 156
Instant Messages ... 157
Menu features ... 157
Modifying settings ... 158
Per-account call notification options ... 158
IM Settings ... 158
Voice Mail Settings ... 158
Remembering settings after logout ... 159
Programmable keys ... 159
Inbox, Outbox, IM log ... 160
Address books ... 160
User status ... 161
Do Not Disturb ... 161
Presence ... 162
Call Forwarding ... 163

Notifications 164
Account selection 164
Index 165

Chapter 1: Revision history

November 2013	Standard 01.01. This is a new document to support SIP Software Release 4.4 on Avaya Aura®.

Chapter 2: Regulatory and safety information

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note:

The user should not make changes or modifications not expressly approved by Avaya. Any such changes could void the user authority to operate the equipment

This Class B digital apparatus complies with Canadian ICES-003. Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Warning:

- This is a Class B product. In a domestic environment this product can cause radio interference in which case the user must take adequate measures.
- Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

この装置は、情報処理装置等電波障害自主規制協議会（ＶＣＣＩ）の基準に基づくクラスＢ情報技術装置です。この装置は、家庭環境で使用することを目的としていますが、この装置がラジオやテレビジョン受信機に近接して使用されると、受信障害を引き起こすことがあります。
取扱説明書に従って正しい取り扱いをして下さい。

Table 1: EMC Compliance

Jurisdiction	Standard	Description
United States	FCC CFR 47 Part 15	Class B Emissions: FCC Rules for Radio Frequency Devices (see Notes 1 and 2)
Canada	ICES-003	Class B Emissions: Interference-Causing Equipment Standard: Digital Apparatus
Australia/New Zealand	AS/NZ CISPR 22 CISPR 22	Class B Emissions: Information technology equipment - Radio disturbance
European Community	EN 55022	Class B Emissions: Information technology equipment - Radio disturbance
	EN 55024	Information technology equipment - Immunity characteristics Limits and methods of measurement
	EN 61000-3-2	Limits for harmonic current emissions (equipment input current <= 16 A per phase)
	EN 61000-3-3	Limitation of voltage fluctuations and flicker in low-voltage supply systems for equipment with rated current <= 16 A
Japan	VCCI	Regulations for voluntary control measures.

Table 2: Safety Compliance

Jurisdiction	Standard	Description
United States	UL 60950-1	Safety of Information Technology Equipment
Canada	CSA 60950-1-30	Safety of Information Technology Equipment
Australia/New Zealand	AS/NZS 60950.1:2003	Safety of Information Technology Equipment
European Community	EN 60950-1	ITE equipment - Safety - Part 1: General requirements

Other

US/Canada: Hearing Aid Compatibility (HAC) as per FCC Part 68 Australia: AS/ACIF S004: Voice Frequency Performance Requirements for Customer Equipment This equipment complies with the CE Marking requirements.

EU Countries: This device complies with the essential requirements and other relevant provisions of Directive 1999/5/EC. A copy of the Declaration may be obtained from www.avaya.com.

Australia: AS/ACIF S004: Voice Frequency Performance Requirements for Customer Equipment.

DenAn regulatory notice for Japan

Warning:

Please be careful of the following while installing the equipment:

- Please only use the connecting cables, power cord, AC adaptors shipped with the equipment or specified by Avaya to be used with the equipment. If you use any other equipment, it may cause “failures, malfunctioning, or fire”.
- Power cords shipped with this equipment must not be used with any other equipment. If the above guidelines are not followed, it may lead to death or severe injury.

警告

本製品を安全にご使用頂くため、以下のことにご注意ください。

- 接続ケーブル、電源コード、ACアダプタなどの部品は、必ず製品に同梱されております添付品または指定品をご使用ください。添付品・指定品以外の部品をご使用になると故障や動作不良、火災の原因となることがあります。
- 同梱されております付属の電源コードを他の機器には使用しないでください。

上記注意事項を守らないと、死亡や大怪我など人身事故の原因となることがあります。

Chapter 3: Introduction to the Avaya 1230 IP Deskphone

Your Avaya 1230 IP Deskphone brings voice and data to your desktop. The IP Deskphone connects directly to a Local Area Network (LAN) through an Ethernet connection. The SIP IP Deskphone communicates using Session Initiated Protocol (SIP) after the software is upgraded to a SIP-enabled version.

Basic features

The Avaya 1230 IP Deskphone phone includes the following features:

- 9 lines with 25-character display capability
- 10 line keys (self-labeled))
- four context sensitive soft keys (self labeled)
- six specialized feature keys
- six fixed call processing keys (three with LED status)::
  - Mute
  - Handsfree
  - Goodbye
  - Applications
  - Headset
  - Hold
- volume up/down key to separately adjust the ringer, speaker, headset, and handset's volume
- four-way navigation cluster plus Enter key
- wall-mountable
- LCD display screen
- high quality speakerphone
- hearing aid compatibility
- handset jack

- headset jack
- 10/100 Ethernet ports
  - one Ethernet port for LAN connection
  - one Ethernet port for optional PC connection
- Power over Ethernet (PoE) through the LAN port, or power through a supported AC adapter
- Accessory Expansion Module (AEM) port to connect the expansion module.

IP Deskphone controls

The following figure shows the Avaya 1230 IP Deskphone.

Figure 1: Avaya 1230 IP Deskphone

This section describes the controls on your IP Deskphone. Your IP Deskphone can have fixed keys with icons or with labels. This document presents both versions of the fixed key.

Key	Function
	When a message is waiting, the red Message Waiting/ Incoming Call indicator LED at the top center of the IP Deskphone flashes. Also, if configured, this indicator glows when the ringer sounds.

Key	Function
	Line keys or speed dial keys are located on either side of the display area and are labeled on the LCD display. You can program these keys as either line or speed dial keys (for one touch dialing). These keys select which line is in use when the IP Deskphone is active and also act as status monitoring keys when a number is set as a speed dial. **Note:** There are 10 line keys on the Avaya 1230 IP Deskphone.
	Context-sensitive soft keys are located below the display area. The LCD label above each key changes based on the active feature.
(Copy) 	Press the **Copy** key to copy contact information from one source, such as the Address Book to a destination, such as a feature key.
(Services) 	Press the **Services** key, and then use the navigation keys to access the following items: 1. Search—search in the local directory (personal Address Book) and the global directory (network Address Book for names and telephone numbers) 2. Login—log in to your IP Deskphone only when the call server supports multiple user logins. 3. Logout—log out of your IP Deskphone. 4. Check For Updates—check for the latest software and configuration update for the IP Deskphone. 5. Retrieve Parked Call (This feature is not available on all call servers.) 6. Reset Phone—reset your IP Deskphone. 7. File Manager—manage the IP Deskphone file system. 8. Logging System—enable or disable the logging process. 9. Phone Information—view information about the hardware and software on your IP Deskphone, including user and location information. Press the **Services** key twice quickly to access the Network menu.
(Quit)	Press the **Quit** key to close an active menu.

Key	Function
	The state of active calls is not affected with you press the **Quit** key.
(Inbox) 	Press the **Inbox** key to access your Call Inbox. The Call Inbox lists all incoming calls on an active IP Deskphone. **Note:** This key does not function to send Instant Messages.
(Redial) 	Press the **Redial** key to display a list of 15 most recently dialed numbers.You can select a number from the redial list and then dial it, save in your Address Book, delete, or check information about the call.
(Directory) 	Press the **Directory** key to access your Address Book.
	Use the **Navigation Key Cluster** to scroll through menus and lists that appear on the LCD display screen or for text entry. The outer part of this key cluster rocks for up, down, left, and right movements.
(Volume) 	Use the **Volume control** buttons to adjust the volume of the ringer, handset, headset, speaker, and the Handsfree feature. Press the top button to increase the volume, and press the bottom button to decrease the volume.
(Mute) 	Press the **Mute** key to listen to the call without transmitting. Press the Mute key again to return to two-way conversation. The Mute key applies to handsfree, handset, and headset microphones. **Note:** When you enable mute, a red LED on the **Mute** key remains lit.
(Handsfree) 	Press the **Handsfree** key to activate the built-in speaker and microphone of the Avaya 1230 IP Deskphone. **Note:** The Handsfree LED indicator on the **Handsfree** key lights to indicate when handsfree is active.
	Use the **Enter** key, at the center of the **Navigation Key Cluster**, to select menu items or to confirm changes.

Key	Function
	Note: The **Enter** key has the same function as the context-sensitive soft keys **Select** and **Set**.
(Goodbye)	Press the **Goodbye/Release** key to terminate an active call. When multiple calls are active, press the **Goodbye/Release** key to end the highlighted call. Use the **Goodbye/Release** to close menu navigation or cancel user tasks.
(Headset)	Press the **Headset** key to answer a call using the headset or to switch a call from the handset or handsfree to the headset. **Note:** The Headset LED indicator on the **Headset** key lights to indicate that the headset is in use.
(Hold)	Press the **Hold** key to put an active call on hold. Press the Hold fixed key to return to a call on hold. You can have several calls in a hold state.
(Expand)	Press the **Expand** key to access the Instant Messaging Log.
	Use the **Dialpad** to enter numbers and text. To navigate to an item in a menu, press the corresponding number on the dialpad to activate the item or to continue to navigate the list of items.

Related topics:

Key press behavior on page 21

Key press behavior

The behavior of the IP Deskphone when you press a fixed key is as follows.

Goodbye/Release, Mute, Hold, Headset, Handsfree and Hookswitch

If there is an active established call, the key action applies to this active call.

If there is no active call, the key action is applied to the call that is highlighted in the list of calls.

Note:

Some actions may be ignored in certain conditions; for example:

- pressing the Goodbye/Release key for a call on local hold
- pressing the Hold key for an incoming call

Line key

If there is an incoming call, and you press the Line key, the incoming call is answered.

If there is an active call, and you press the Line key, the Line key press is ignored.

If there are no incoming or active calls, the Line key press is applied to the call that is highlighted in the list of calls.

If there is an active established call and at the same time another call comes in, pressing the Line key puts the active call on hold and answers the incoming call.

If there are several incoming calls at the same time, the newest call is answered. In order to answer a different call, you must select it and press the corresponding soft key.

Soft keys are always used to perform actions on the highlighted call.

Avaya 1230 IP Deskphone display

Your Avaya 1230 IP Deskphone has three display areas:

- The upper display area provides line and feature key status.
- The middle display area contains single-line information for items such as caller number, caller name, menu items, feature prompt strings, user-entered digits, date and time information, and telephone information.
- The lower display area provides context-sensitive soft key label information.

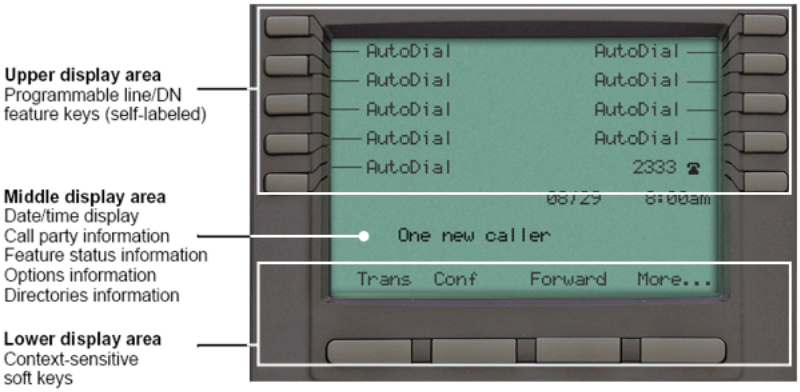

Figure 2: IP Deskphone LCD Screen

Related topics:

Cleaning the Avaya 1230 IP Deskphone LCD display screen on page 23

Cleaning the Avaya 1230 IP Deskphone LCD display screen

To clean the LCD display screen, gently wipe with a soft, dry cloth.

Caution:

Do not use any liquids or powders on the IP Deskphone. Using anything other than a soft, dry cloth can contaminate IP Deskphone components and cause premature failure.

Context-sensitive soft keys

Your IP Deskphone has four context-sensitive soft keys beneath the LCD screen. The context-sensitive soft keys access different features and menus depending on the state of the IP Deskphone and the menu you access.

The following figure shows the context-sensitive soft keys while the IP Deskphone is in the idle state.

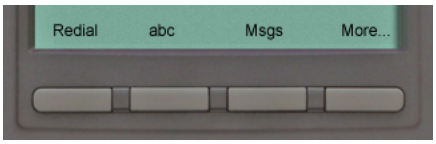

Figure 3: Idle state context-sensitive soft keys

Note:

Not all the following soft keys may be displayed, depending on the configuration of your system and your IP Deskphone.

Table 3: Menu items accessed through context-sensitive soft keys

Item	Function
Redial or NewCall	Press the **Redial** context-sensitive soft key to redial the last dialed number. If there is no stored redial number, the **NewCall** context-sensitive soft key appears and has the same effect as pressing the primary user line key (dial prompt).
abc or 123	Press the **abc** context-sensitive soft key to toggle between alpha and numeric input modes.

Item	Function
	• To type letters, the **abc** context-sensitive soft key must be displayed. • To type numbers, press the **abc** context-sensitive soft key to display the **123** context-sensitive soft key on the menu list.
Msgs	Press the **Msgs** context-sensitive soft key to access the following features: 1. Voice Mail—use to call your Voice Mail number. 2. Instant Messaging—use to access the Instant Messaging Inbox/Outbox.
More..	Press the **More..** context-sensitive soft key to select a new menu list of context-sensitive soft keys (three menu lists are available). When you press the **More..** context-sensitive soft key, a different selection of context-sensitive soft keys appears. • If you press the **More..** context-sensitive soft key once from the first menu list, you access the following context-sensitive soft keys: [CallFw] [DND] [Presnc] [More..] • If you press the **More..** context-sensitive soft key from the first menu list twice, you access the following context-sensitive soft keys: [ScrnSv] [Prefs] [<blank>] [More..] • If you press the **More..** context-sensitive soft key from the first menu list three times, you return to the first menu list with the following context-sensitive soft keys. [Redial] [abc] [Msgs] [More..]
*When you press the **More..** soft key for the first time, the following soft keys appear on the menu list.*	
CallFw	Press the **CallFw** soft key to forward all calls to a specified address.
DND	Press the **DND** soft key to block all calls.
Presnc	Press the **Presnc** soft key to configure the presence status for your IP Deskphone.

Item	Function
More.. 	Press the **More..** soft key to select a new menu list of context-sensitive soft keys. The next available menu list contains the following soft keys: [ScrnSv] [Prefs] [<blank>] [More..]
*When you press the **More..**context-sensitive soft key for the second time, the following soft keys appear on the menu list.*	
ScrnSv 	Press the **ScrnSv** soft key to activate the screensaver (only if the screensaver feature is enabled).
Prefs 	Press the **Prefs** soft key to display the Preferences menu. The menu items include the following: 1. Display—use to adjust the display settings of the LCD screen. 2. Audio—use to adjust tones and volume settings, and codec selection. Press the **Audio** context-sensitive soft key to access the following features: **Tones** • Ring Pattern - Select test patterns from 1 to 8 • Alerting Volume - Set Desired volume **Voice** Configure the volume for the following: • Handset Volume • Headset Volume • Handsfree Volume **Codecs** Select the Audio Codecs: • G722 (wideband codec) • PCMU (standard u-law) • G729 (729 codec) • PCMA (standard a-law) **Note**: You can change the audio settings to improve audio quality based on the available band width. If the Internet bandwidth is low, you

Item	Function
	can improve the audio quality by changing the audio setting to low. **Audio Quality** • Monitor Audio Quality—used to view details about the audio quality of an active call. 3. Feature Options—use to configure the following: • Feature keys • Call Ignore Action • Call Subject • Call Fwd Notification • Missed Call Notification 4. Language—use to change the interface language. 5. Misc Options—use to access the following options: • Alpha Dialing • Search Method • Incoming Privacy • Outgoing Privacy • # Ends Dialing • Hold Mode: Private • Time 6. Network—use to access the following: • Server Settings • Device Settings • Diagnostics • Licensing • Lock 7. User Settings - use to modify the following: • Call Settings • IM Settings • Voice Mail Settings • Change Location
(blank)	No soft key label.

Item	Function
More..	Press the **More..** soft key to return to the first menu list of context-sensitive soft keys. The next available menu list contains the following soft keys: [Redial] [abc] [Msgs] [More..]

Related topics:

[Idle display screen after dial pad input](#) on page 27
[In-call context-sensitive soft keys](#) on page 28

Idle display screen after dial pad input

After you enter information using the dial pad (there is no dial tone or preceding line selection), the context-sensitive soft keys displayed on the idle screen appear as shown in the following figure.

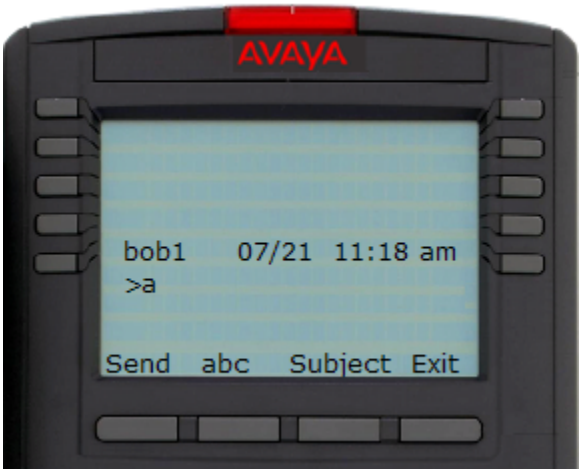

Figure 4: Idle display screen after dial pad input

Item	Function
Send	Press the **Send** soft key to dial out the user input using the primary login of the IP Deskphone. User input is run against the dialing plan.
abc or 123	Press the **abc** or **123** soft key to toggle between alpha and numeric input mode.
Subject	Press the **Subject** soft key to enter a subject line to your outgoing call before pressing the **Send** soft key.

Item	Function
Exit 	Press the **Exit** soft key to clear the user input and return to the initial idle screen that displays the following soft keys: **[Redial] [abc] [Msgs] [More...]**.

In-call context-sensitive soft keys

When a call is active, use the context-sensitive soft keys to access the menu items shown in the following table.

Figure 5: In-call context-sensitive soft keys

Table 4: Menu items accessed during an in-call session through context-sensitive soft keys

Item	Function
Conf 	Press the **Conf** context-sensitive soft key to obtain a dial tone to place another call during an active call or to make a conference call. The **Conf** context-sensitive soft key behaves like the **NewCal** context-sensitive soft key.
Trnsfr 	Press the **Trnsfr** context-sensitive soft key to transfer the current call to another location or to another contact.
Audio 	Press the **Audio** soft key to: 1. Change Audio Codec • G722 (wideband codec) • PCMU (standard u-law) • G729 (729 codec) • PCMA (standard a-law) 2. Monitor Audio Quality—used to view details about the audio quality of an active call.
Actvat	The **Actvat** context-sensitive soft key appears when the call is not active. The most common usage of this

Item	Function
	key is when the call displayed onscreen is a call that the user placed on hold. **Note**: The **Actvat** context-sensitive soft key never appears at the same time as the **Audio** context-sensitive soft key.
More… 	When you press the **More…** context-sensitive soft key, a different selection of context-sensitive soft keys appears. • f you press the **More…** context-sensitive soft key once from the first menu list, you access the following context-sensitive soft keys: [NewCal] [Prefs] [<blank>] [More….] • If you press the **More…** context-sensitive soft key from the first menu list twice, you return to the first menu list with the following context-sensitive soft keys. [Conf] [Trnsfr] [Audio/Actvat] [More…]
*When you press the **More…** context-sensitive soft key for the first time, the following context-sensitive soft keys appear on the menu list.*	
NewCal 	Press the **NewCal** context-sensitive soft key to obtain a dial tone to place another call during an active call or to a make a conference call. The **NewCal** context-sensitive soft key behaves like the **Conf** context-sensitive soft key.
Prefs 	Press the **Prefs** context-sensitive soft key to display the Preferences menu. The menu items include the following: 1. Display—use to adjust the display settings of the LCD screen. 2. Audio—use to adjust tones and volume settings. 3. Feature Options—use to configure the following: • Feature keys • Call Ignore Action • Call Subject • Call Fwd Notification • Missed Call Notification • Answer Mode Settings — appears when the Auto Answer Mode is enabled on the IP Deskphone.

Item	Function
	4. Language—use to change the interface language. 5. Misc Options—use to access the following options: • Alpha Dialing • Search Method • Incoming Privacy • Outgoing Privacy • # Ends Dialing • Hold Mode: Private • Time 6. Network—use to access the following: • Server Settings • Device Settings • Diagnostics • Disable screensaver • Licensing • Lock 7. User Settings—use to modify the following: • Call Settings • IM Settings • Voice Mail Settings • Change Location
(blank)	No soft key label.
More…	Press the **More...** soft key to return to the first menu list of context-sensitive soft keys [Conf] [Trnsfr] [Audio/Actvat] [More...]
Note: The **Unlock** context-sensitive soft key appears if you answer a call when the IP Deskphone is locked with a password-protected screensaver.	

Navigation keys

This section provides information about keys you can use to navigate within the menus of your Avaya 1230 IP Deskphone.

Note:

Menu items are sorted by number.

You can select menu items in one of the following ways:

- Press the corresponding number on the dialpad and then press the **Select** soft key.
- Use the navigation key to scroll through the menu to highlight the item you want to select and then press the **Select** soft key.

Table 5: Navigation keys and functions

Key	Function
Navigation Key Cluster 	Press the Left or Right arrows on the **Navigation Key Cluster** to: • Scroll long lines of text when you view caller ID. **Note:** The IP Deskphone automatically scrolls long lines of text from right to left for entries such as in your address book or your Call Inbox. When your Search Method is set to Index Search, you can increase the speed of the scrolling by repeatedly pressing the right navigation key or decrease the scrolling speed by repeatedly pressing the left navigation key. • Change the slide adjustment from left to right when you adjust such things as contrast or volume.
Navigation Key Cluster 	Press the right side of the **Navigation Key Cluster** to: • Create a space when you enter and edit text. • View the details of the selected call log entry in the Inbox.
Navigation Key Cluster	Press the left side of the **Navigation Key Cluster** to: • Move cursor to the left when you enter and edit text. • Leave the detail view of the Inbox and return to the main Inbox. Operates like the **Back** soft key.

Key	Function
	Press the up or down arrows on the **Navigation Key Cluster** to: • Erase a character (backspace) when you enter and edit text. • Highlight items in a list, such as Address Book entries or items in your Call Inbox. • Scroll lists and message contents when you view Instant Messages. • Move the cursor from line to line when entering and editing text or data. **Note**: To scroll through a list of items, you can press and hold the up or down key.

Visual indicators

The IP Deskphone uses visual indicators or cues to indicate incoming calls and messages. The display icons on the IP Deskphone also indicate the current call state, the status of Inbox calls, and Instant Messages (IMs), and the Presence state of contacts designated as Friend.

Related topics:

Display screen icons on page 32
Visual Alerter/Message Waiting Indicators on page 34

Display screen icons

The following tables list the display icons of the IP Deskphone.

Table 6: Display screen icons — Call State

Component	Icon
On hook	
Incoming/Outgoing call (phone ringing)	
On the phone	

Component	Icon
On hold	
Missed call	

Table 7: Display screen icons — Feature button icons

Component	Icon
Do Not Disturb	
Call Forward	
Speed Dial list	
Send IM	

Table 8: Display screen icons — Instant Messaging

Component	Icon
New, Unread	
Read	
Replied to	
Sent/forwarded	

Table 9: Display screen icons — Inbox

Component	Icon
Incoming Call Answered	
Incoming Call Missed, New	

Component	Icon
Incoming Call Missed, Reviewed	

Table 10: Display screen icons — Presence

Component	Icon
Terminated	
Connected Inactive	
Unavailable Busy or Offline	
Active Available	
On the Phone	
Unknown	

Visual Alerter/Message Waiting Indicators

The red LED light at the top right of the IP Deskphone lights to indicate incoming calls or when a caller leaves you voice mail.

The following table lists the visual indicator and the LED status.

Table 11: Visual Alerter/Message Waiting Indicator

LED	Visual indicator	LED status
Red LED	Voice mail left by caller	Steady red light until message is reviewed
	Incoming call (phone ringing)	Fast blinking red light

Available IP Deskphone call features

The IP Deskphone is designed to be supported by various call servers. The specific call server in which the IP Deskphone is connected to determines whether certain features are available to your IP Deskphone. Call features must be assigned to your IP Deskphone and must be supported by call server software.

Note:

- Not all feature are available. To determine which features are available or to activate features, contact your system administrator or service provider.
- Not all service providers support the entry of a SIP address to initiate a call, for example, jim@companya.com. Some service providers require that you enter a Directory Number (DN) to initiate a call, for example, 555-5555. Contact your system administrator to determine whether your call server supports SIP address dialing.

Security features

Before you can use your IP Deskphone, an ID and password must be assigned to your IP Deskphone. This security measure ensures that, after you log off, calls cannot be made from your IP Deskphone and features such as Address Book and Instant Message logs are inaccessible. Your ID and password also prevent unauthorized access to your user profile.

Related topics:

Secure connection on page 35

Secure connection

A secure connection is identified by the presence of a security icon (padlock) that is displayed on the IP Deskphone screen.

After the IP Deskphone is registered with the SIP Proxy, the security icon is displayed when:

- the IP Deskphone is idle
- you are on an active call

Chapter 4: Installing the 1230 IP Deskphone

This chapter describes how to install and connect your 1230 IP Deskphone.

Before you begin

Caution:

Do not plug your IP Deskphone into a regular telephone jack. This can result in severe damage to the IP Deskphone. Consult your system administrator to ensure that you plug your telephone into a 10/100/1000 BaseT Ethernet jack.

Caution:

Your IP Deskphone is designed for use in an indoor environment only.

Caution:

Do not plug your Avaya 1230 IP Deskphone into an Integrated Service Digital Network (ISDN) connection. Severe damage to the Avaya 1230 IP Deskphone can result.

Connecting the components

Install your IP Deskphone by completing the following procedures in the order listed:

- Attaching the foot stand (optional)
- Connecting the AC power adapter (optional)
- Connecting the handset
- Connecting the headset (optional)
- Connecting the LAN ethernet cable
- Connecting the PC Ethernet cable
- Wall-mounting the IP Deskphone (optional)

The following figure shows the connections on the IP Deskphone.

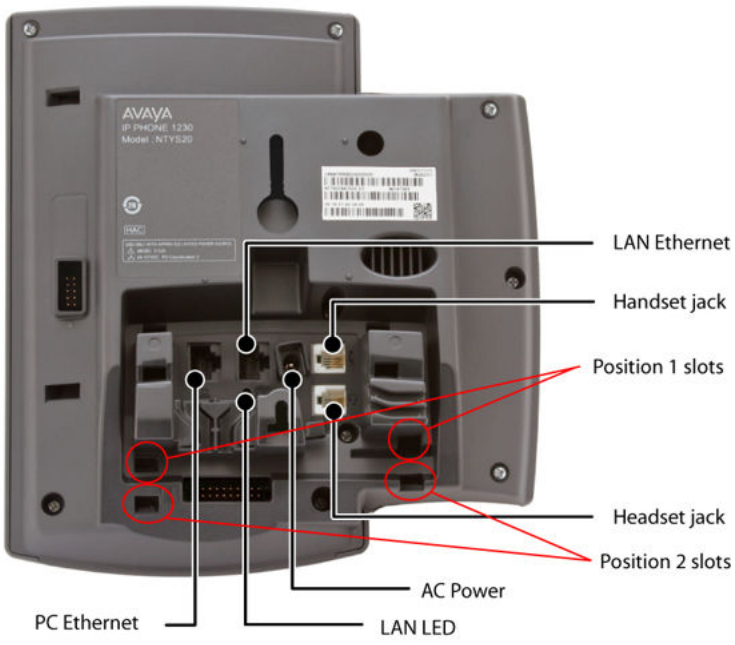

Figure 6: IP Deskphone connections

Warning:

Ensure that the protective rubber cap on the Expansion Module port is in place when the port is not in use. Connection of anything other than the proper Expansion Module connector to this port can cause damage to the IP Deskphone.

Related topics:

[Attaching the foot stand (optional)](#) on page 38
[Connecting the handset](#) on page 39
[Connecting the headset (optional)](#) on page 39
[Connecting the AC power adapter (optional)](#) on page 39
[Connecting the LAN ethernet cable](#) on page 40
[Connecting the PC Ethernet cable](#) on page 40

Attaching the foot stand (optional)

Attach the foot stand in the appropriate slots depending on the desired angle for your Avaya 1230 IP Deskphone. If you insert the foot stand into the upper slots, your Avaya 1230 IP Deskphone sits at a 25-degree angle.

If you insert the foot stand into the lower slots, your Avaya 1230 IP Deskphone sits at a 55-degree angle.

1. Align the bottom tabs on the foot stand with the position 1 slots or the position 2 slots on the back of your Avaya 1230 IP Deskphone. In position 1, the Avaya 1230 IP Deskphone sits at a 25-degree angle.

   In position 2, the Avaya 1230 IP Deskphone sits at a 55-degree angle.

   Connecting the components shows the slots on the back of the IP Deskphone.

2. Press the foot stand into the slots until it snaps into place.

   Note:

   If you mount your Avaya 1230 IP Deskphone on a wall, do not attach the foot stand.

Connecting the handset

Use the following procedure to connect the handset to the IP Deskphone.

1. Plug the end of the handset cord with the short straight section into the handset.
2. Plug the other end of the handset cord with the long straight section into the handset jack marked with the handset symbol.
3. (Optional) Thread the cord through the channel in the foot stand (if installed) so that it exits on the side of the foot stand.

Connecting the headset (optional)

If you have a headset, you can connect the headset to the IP Deskphone as given in the following procedure:

1. Plug the headset cord into the headset jack on the back of the IP Deskphone.
2. Thread the cord through the channel in the side of the foot stand (if installed).
3. Set up the headset according to the headset instructions.

Connecting the AC power adapter (optional)

Your 1230 IP Deskphone supports AC power or Power over Ethernet (PoE). To use local AC power, use only the Avaya-approved Global Power Supply (NTYS17xxE6) and country-

specific IEC cable. You can order the Avaya-approved AC adapter and country-specific IEC cable separately.

Warning:

Use only the approved Avaya Global Power Supply with your 1230 IP Deskphone.

To use PoE, where power is delivered over the CAT5 cable, your connected LAN must support PoE. If you use PoE, you do not require an AC adapter.

1. Connect the DC barrel connector to the power jack on the back of the IP Deskphone.
2. Thread the cable through the channel in the foot stand (if installed) to secure the cable.
3. Plug the country-specific IEC cable into the Global Power Supply, and then plug the Global Power Supply into the nearest AC power outlet.

Connecting the LAN ethernet cable

Connect your IP Deskphone to your LAN using a CAT5e Ethernet cable to enable full functionality of your IP Deskphone. If your Ethernet port is equipped with Power over Ethernet (PoE), your Avaya 1230 IP Deskphone can be powered through the LAN port. Do not extend the LAN Ethernet cable outside the building.

To connect your IP Deskphone to your LAN, use the following procedure:

1. Plug one end of the supplied LAN Ethernet cable into the LAN Ethernet port on the back of your IP Deskphone as shown in IP Deskphone connections on page 38.
2. Thread the cable through the channel in the foot stand (if installed).
3. Connect the other end of the cable to your LAN Ethernet connection. The LAN LED on the back of the IP Deskphone lights when a LAN connection is established.

Note:

When your LAN cable gets unplugged on an active IP Deskphone, your IP Deskphone LCD displays an alert message `LAN cable unplugged`.

Connecting the PC Ethernet cable

Connect a CAT5e PC Ethernet cable between your Avaya 1230 IP Deskphone and your computer to enable your computer to access the LAN.

1. Plug one end of the PC Ethernet cable (not supplied) into the PC Ethernet port on the back of your Avaya 1230 IP Deskphone as shown in IP Deskphone connections on page 38.
2. Thread the cable through the channel in the foot stand (if installed).
3. Connect the other end of the cable to the LAN port on your PC.

Entering text

You use can use combinations of the letters and numbers on the dialpad of your IP Deskphone to, for example, spell names or words in Instant Messages (IMs), enter SIP addresses, create Address Book entries, and to designate feature key labels.

To make a call, you can dial an alphanumeric SIP address; for example, jdoe2@domain.com.You can enter and edit text on your IP Deskphone using the following methods.

Note:

Some service providers support only the use of a Directory Number (DN) such as 555-5555 to initiate a call to another IP Deskphone. Contact your system administrator or service provider to determine if alphanumeric dialing is supported. Alphanumeric dialing consists of string of text that contain letters and numbers that make up, for example, a SIP address.

Related topics:

Using the dialpad on page 41

Using the dialpad

You can use combinations of the letters and numbers on the dialpad of your IP Deskphone to, for example, spell names or words in Instant Messages (IMs), enter SIP addresses, create Address Book entries, and to designate feature key labels.

To make a call, you can dial an alphanumeric SIP address (for example, jdoe2@domain.com) or you can dial a Directory Number (DN), depending on the local system configuration.

Note:

Some service providers support only the use of a Directory Number (DN) such as 555-5555 to initiate a call to another IP Deskphone. Contact your system administrator or service provider to determine if alphanumeric dialing is supported. Alphanumeric dialing consists of string of text that contain letters and numbers that make up, for example, a SIP address.

Related topics:

Entering text using the IP Deskphone dialpad on page 42
Enabling and disabling the # Ends Dialing feature on page 43
Configuring the dialpad to alphanumeric dialing on page 44

Entering text using the IP Deskphone dialpad

If an application offers text input and you use the dialpad to enter text, the system activates the **abc/123** soft key.

You can toggle between numeric and alphabetic input as follows:

- When the soft key label is **abc**, you can enter alphabetic text.
- When the soft key label is **123**, you can enter numbers.

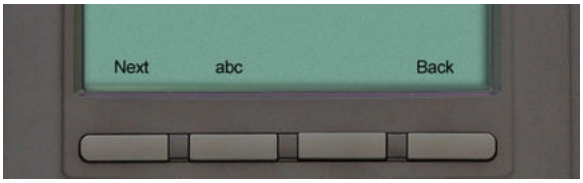

Figure 7: Context-sensitive soft key abc/123

For example, if you want to enter the lower case letter *a*, press the **abc/123** soft key to toggle to alphabetic input. Then press the number **2** key once. If you want to enter the upper case letter *C*, press the number **2** key six times. You can cycle through the letters (and the numeral) by pressing the number button repeatedly.

To create names or words that contain two adjacent letters that appear on the same button, for example, the word ***press***, you can do the following:

1. To enter the first character, press the dialpad key **6**.
2. Pause briefly.
3. To enter the next letter, press the dialpad key **6** twice to cycle to the letter r.

When entering alphanumeric information, the **1** key on the dialpad represents the characters in the table below. To enter a special character, press the dialpad number **1** to cycle through the characters until you reach the one you need. For example, to enter a question mark (?), press the number **1** key eight times.

Table 12: Alphanumeric characters for dialpad key 1

Character	Name
@	at
.	period
-	dash
_	underscore

Character	Name
&	ampersand
'	apostrophe
^	carat
?	question mark
!	exclamation point
(	left parentheses
)	right parentheses
,	comma
****	backslash
/	forward slash
:	colon
;	semi-colon
~	tilde
=	equal
+	plus
1	numeral 1

Note:

No letters are associated with the 0 key; however, double pressing it inserts a blank character (a space).

Enabling and disabling the # Ends Dialing feature

You can enable the IP Deskphone to use the octothorpe (#) symbol to immediately dial the address or phone number.

To enable the # Ends Dialing feature:

1. Press the **Prefs** soft key, and then select **Misc Options**. Highlight **# Ends Dialing** and press the **Change** soft key.
2. Press the **On** soft key to turn on **# Ends Dialing**.

   OR

   Press the **Back** soft key to keep existing configurations and return to the **Preferences** menu.

To disable the # Ends Dialing feature:

1. To turn off **# Ends Dialing**, press the **Prefs** context-sensitive soft key, and then select **Misc Options**. Highlight **# Ends Dialing** and press the **Change** context-sensitive soft key.
2. Press the **Off** context-sensitive soft key to turn off **# Ends Dialing**.

   OR

   Press the **Back** context-sensitive soft key to keep existing configurations and return to the **Preferences** menu.

Configuring the dialpad to alphanumeric dialing

To eliminate the need to press the **abc/123** soft key when you enter text, you can configure the IP Deskphone dialpad default to alphabetic mode.

To configure the dialpad to alphabetic mode as the default:

1. Press the **Prefs** soft key, and then select **Misc Options**. Highlight **Alpha Dialing**, and then press the **Change** soft key.
2. Press the **On** soft key to turn on alphanumeric dialing.

   OR

   Press the **Back** soft key to keep existing configurations and return to the **Preferences** menu.

To disable alphabetic mode and configure numeric mode as the default:

1. Press the **Prefs** soft key, and then select **Misc Options**. Highlight **Alpha Dialing**, and then press the **Change** soft key.
2. Press the **Off** soft key to turn on alphanumeric dialing.

   OR

   Press the **Back** soft key to keep existing configurations and return to the **Preferences** menu.

Chapter 5: Accessing the Avaya 1230 IP Deskphone

You require a log on ID and a password to log on to a server with your Avaya 1230 IP Deskphone.

Logging on

Whenever you log on to your Avaya IP Deskphone, you must do the following:

- confirm your logon ID
- enter your password
- select the duration of this session

The first time you use your IP Deskphone, you need to complete some of the procedures in the following topics:

- Automatic login
- Configuring the domain
- Selecting a language
- Logging on to your IP Deskphone
- Configuring the duration of the login
- Selecting a location
- User Profile
- Overwriting your personal Address Book

Note:

The system automatically logs you back on after a power outage or software upgrade. The system administrator configures this feature on a network-wide basis.

Related topics:

Automatic login on page 46
Configuring the domain on page 46
Password protection for domains on page 47
Selecting a language on page 47
Logging on to your Avaya IP Deskphone on page 48

Configuring the duration of the login on page 49
Logging on multiple user accounts on page 49

Automatic login

Before you first receive your Avaya 1230 IP Deskphone, your system administrator can configure your IP Deskphone with your user logon and password. If this is the case, after you plug in the IP Deskphone you can use it without further configuration.

Note:

If the IP Deskphone is configured with automatic logon, you can not use the log off function, and you need a password to access some features and functions. Contact your system administrator or service provider for further information.

Configuring the domain

Before the log on process, if you need to change the domain or confirm that the domain you log on to is correct, press the **Domain** soft key from the logon prompt. The current domain appears on the IP Deskphone LCD screen. You can edit the domain that is listed or press the **Domain** soft key to access a list of available domains to which you can choose to connect.

Note:

- You must enter the admin password to edit domains.
- Check with your system administrator before editing or changing domains.

To change the domain:

1. Press the **Domain** soft key to change the current domain.

   Note:

   You must enter an admin password before you can edit the domain in which the IP Deskphone connects.

2. Press the Up/Down navigation key to highlight the new domain you want to use.
3. Press the **Select** soft key to change the domain to the highlighted domain from the list. The IP Deskphone returns to the **Current Domain** page, and the new domain appears.

   OR

   Press the **Back** soft key to keep existing configurations and return to the previous menu.

Password protection for domains

This feature supports admin password protection for editing of the domain and is not required for switching domains. If you log on using the administrator password, you can use the editing domain option for both the Current Domain state and Domain List state.

After you press back on the edit page or on the password prompt, the idle display appears. You must enter the admin password to reenter the editing domain.

Password check to switch domains

When no one is logged on, a domain soft key appears. When you press the domain soft key, the current domain page appears without a password query.

Password protection for editing domain

When you press **Edit** for a domain, the admin password prompt appears. The editing domain page appears after you enter the correct admin password. If you do not enter the correct password, the message “incorrect password” appears with a prompt to retry.

Password request in server settings mode

When you edit the domain from the server settings under the Network menu, you are prompted to enter the admin password. After you enter the password, the Domain page appears. When you press the **Edit** context-sensitive soft key, there is no prompt for the admin password because you have already entered the admin password to load the Server Settings menu.

Selecting a language

The display is available in multiple languages. A maximum of five languages are accessible through the IP Deskphone. The system administrator determines which languages are available for your IP Deskphone.

To select a language:

1. Press the **Prefs** soft key, and then select **Language**.

   The current language displays.
2. Press the **Change** soft key to change the language.
3. Press the **Up/Down** navigation key to scroll and highlight the desired language (for example, German [Deutsche]).
4. Press the **Select** soft key to save the desired language and return to the previous screen.

   OR

   Press the **Back** soft key to keep the existing configurations and return to the **Preferences** menu.

Logging on to your Avaya IP Deskphone

You need to log on to your Avaya IP Deskphone when you first install and restart your IP Deskphone and anytime you log off or reboot.

Note:

- When you log on to the IP Deskphone for the first time, the system prompts you for a location.
- The IP Deskphone retains the previous user logon ID, which appears after the ID prompt whenever the IP Deskphone reboots.

If Authentication is enabled by your system administration, you can enter your authentication ID independent of your user ID. The authentication ID is used when the server challenges the IP Deskphone.

To log on to the IP Deskphone:

1. Press the **abc/123** soft key to toggle between alphabetic or numeric input.
2. Use the dialpad to enter your user ID login at the prompt.

   Note:

   Use the left navigation key to backspace and remove a previous user ID.
3. Press the **Login** soft key. If Authentication is enabled by your system administration, you are presented with the Authentication ID screen. The authentication ID is autofilled with your user ID.

   If Authentication is not enabled, a new screen appears and prompts you for your password:

   - Press the **abc/123** soft key to toggle between alphanumeric or numeric input.
   - Use the dialpad to enter your authentication ID login at the prompt.
   - Press the **Login** soft key.
4. Enter your password by using the dialpad.

   Note:

   - When you enter your password, the last character entered appears. However, all previous characters are hidden.
   - When you enter your password and you use the navigation key to backspace, you erase all the characters and must completely re-enter your password again.
5. Press the **Next** context-sensitive soft key.

Note:

You can cancel the login process by pressing one of the following keys:

- Cancel
- Goodbye
- Quit

Configuring the duration of the login

After you enter your logon ID and password the **Duration** screen appears. You can enter the maximum length of time of the session. If you choose to use the default duration Permanent, you remain logged on to the phone until you log off.

To configure the login duration:

1. Press the **Next** soft key to configure the logon duration to **Permanent**. A login confirmation screen appears.

   OR

   Press the **Timed** soft key to open a screen to configure a maximum time to remain logged in.

   Note:

   If you press the **Timed** soft key, you must then configure the duration of the login.

2. Press the **Period** soft key to toggle the logon duration entries between hours or days.
3. Use the dialpad to enter the number of hours or days you want to remain logged on and press the **Next** context-sensitive soft key.

   OR

   Press the **Back** soft key to return to the permanent logon screen.

   OR

   Press the **Cancel** soft key to return to the first logon screen.

Logging on multiple user accounts

The IP Deskphone has a multiuser feature that allows multiple SIP user accounts to be active on the IP Deskphone at the same time. For more information about logging on multiple users, see Multiuser on page 151

Timed logoff

When you determine a logon time other than permanent, the IP Deskphone reminds you of your expiry time.

Related topics:

Timed logoff while IP Deskphone is idle on page 50
Timed logoff while on a call on page 50

Timed logoff while IP Deskphone is idle

When the login time expires and the IP Deskphone is idle (not on a call), you can do one of the following at the prompt:

- Press the **Yes** context-sensitive soft key to log off immediately.
- Press the **No** context-sensitive soft key to switch to Permanent logon.
- Press the **Quit** or **Release/Goodbye** key to logout immediately.

If you do not respond, the prompt times out in 45 seconds and the IP Deskphone logs off.

If you answer a call during the logout prompt, the logon switches to permanent login.

Timed logoff while on a call

When the login time expires while you are on a call, you can do one of the following at the prompt:

- Press the **Yes** context-sensitive soft key to log off immediately.
- Press the **No** context-sensitive soft key to switch to Permanent logon.
- Press the **Quit** key to dismiss the log out prompt and switch to permanent login.
- Press the **Release/Goodbye** key to dismiss the logout prompt and switch to permanent login.

Note:

If you press the **Release/Goodbye** key to dismiss the logout prompt, you also terminate the call.

If you do not respond, the prompt times out in 45 seconds and the IP Deskphone switches to permanent login.

Selecting a location

When you first login to the IP Deskphone, the system prompts you for a location. The location you select is saved in your User Profile.

Depending on your service provider, the Enhanced Emergency Service uses the location you select or the Directory Number (DN) on the call server, when handling emergency calls. The configuration of the call server determines how emergency service calls are handled by your IP Deskphone.

Note:

- During an emergency call, you cannot log out from the IP Deskphone or release or disconnect the call. The IP Deskphone remains connected to the emergency service until the emergency service operator disconnects it.
- If the login time expires during an emergency call, a prompt does not appears and the IP Deskphone automatically switches to permanent login.
- When you configure your user profile for the first time, you must confirm that the selected location is correct. You can view your location by accessing the IP Deskphone information screen. For more information, see “Viewing the IP Deskphone information”.

User Profile

Your User Profile contains your specific settings and data. You are prompted to create a User Profile the first time you log on to your IP Deskphone. If you delete your User Profile, the IP Deskphone reboots, and you must log on and create a new User Profile. When you log on to your IP Deskphone, your specific settings and data are automatically available for you.

The information stored in your user profile includes:

- Independent volume adjustments for handset, headset, and handsfree
- Alerting Volume adjustment
- Idle Screen display text
- Voice Mail settings (number and mailbox ID)
- User location (from a server-provided list)
- Time, Date, and Zone format settings
- Call Subjects

- Instant Messaging settings and Instant Message Inbox/Outbox
- Default dialing (alpha/numeric)
- Call Ignore action (local/network)
- Search method (Name, First character, Index)
- User Presence selection
- Dialing pattern default (alpha/numeric)
- Address Book entries
- Call Inbox entries
- Programmable keys configuration
- # Ends dialing configuration

Confirmation logon screen

When you complete the logon process, a logon confirmation screen appears. Press **OK** to complete the logon process.

If the login is unsuccessful, a login error message

```
Failed to login user
```

is displayed.

Press the **OK** soft key to return to the first logon screen.

The most common cause for logon failure is the incorrect entry of the password.

Logging off from the IP Deskphone

To log off from the IP Deskphone:

1. Press the **Services** fixed key, and then select **Logout** from the menu.
2. Press the **abc/123** soft key to toggle between alphabetic or numeric input.
3. Use the dialpad to enter your password at the prompt.
4. Choose one of the following:
   - Press the **Logout** soft key to complete the logout process. The IP Deskphone returns to the **User Login** screen.

- Press the **Back** soft key to remain logged on and return to the Services menu.

Related topics:

Logging off multiple user accounts on page 53

Logging off multiple user accounts

The IP Deskphone has a multiuser feature that allows multiple SIP user accounts to be active on the IP Deskphone at the same time. By logging off of the primary account, all other accounts log off automatically. By logging off of a secondary account, you remove the selected secondary account from the autologin list.

Making an emergency call

You can use the IP Deskphone to make an emergency call to the Public Safety Answering Point (PSAP) from any accessible screen without logging on.

When you pick up the handset, press the Handsfree key or Headset key without logging on, a message “`Emergency calls only`” appears, and the IP Deskphone can only be used to make an emergency call. All soft keys and feature keys are blank and unusable except for the second soft key which allows you to switch between numeric and alphabetic characters. If you hang up before the connection is established, the IP Deskphone returns to the initial state. After the connection is established, the call can be disconnected only by an operator. If you hang up after the connection has been made, the IP Deskphone switches to loudspeaker. If the loudspeaker is already on, and you press the hang up button, nothing happens. The call is not disconnected.

When you make an emergency call, the location of the IP Deskphone is forwarded to the PSAP.

Note:

When the IP Deskphone is waiting for the user to log on or it is blocked by a screen saver, you can still make an emergency call. If you pick up the handset, a message "`Emergency calls only`" appears and the IP Deskphone can be used for making only emergency calls.

To make an emergency call:

1. Choose one of the following:
   - Pick up the handset.

- Press the handsfree button.
- Press the headset button.

Note:

Hang up or switch off the handset to return to normal state.

2. Dial the emergency number that is provided by your dialing plan.
3. Press the **Send** soft key.

Note:

If you try to dial the number that does not match the dialing plan, a message appears to inform you that the number is incorrect.

Related topics:

Location information on page 54

Location information

When you make an emergency call, the IP Deskphone provides the PSAP with the location information of the IP Deskphone. The IP Deskphone receives the location information when the IP Deskphone is first plugged in to the network and then stores it.

To view your location, press the **Services** hard key, choose **Phone Information,** and then press the **E911** soft key.

You can obtain location information only if it has been configured on your system.

Chapter 6: Configuring the Avaya 1230 IP Deskphone

You can adjust a few settings of the Avaya 1230 IP Deskphone to conform to the environment where you want to use the phone. These settings are saved to your User Profile. This chapter describes some of the settings that you can customize on your IP Deskphone.

Adjusting the display screen contrast

Note:

Adjusting the display screen contrast of the IP Deskphone also adjusts the Expansion Module contrast, if you have an Expansion Module connected to your IP Deskphone.

To adjust the display screen contrast:

1. Press the **Prefs** soft key, select **Display** > **Display Settings** and then select **Contrast**.
2. Press the **Left/Right** navigation key to increase or decrease the display contrast level.
3. Choose one of the following:
   - Press the **Apply** soft key to save the changes and return to the **Display** menu.
   - Press the **Cancel** soft key to keep the existing configurations and return to the **Display** menu.

Creating the idle screen text display

You can create a text to display on the screen, while the IP Deskphone is idle.

To create the idle screen display text:

1. Press the **Prefs** soft key, select **Display**, and select **Idle Screen Text Display**.
2. Press the **abc/123** soft key to toggle between alphabetic or numeric input.

3. Use the dialpad to enter the display text you want to appear on the idle screen display of the IP Deskphone.
4. Press the **Save** soft key to save the idle screen text display.

   OR

   Press the **Back** soft key to keep the existing screen display text and return to the **Display** menu.

Configuring Menu Auto back-out

You can use the Menu Auto back-out feature to configure the time interval required for the IP Deskphone to go back to the idle screen when the IP Deskphone is left inactive.

To configure Menu Auto back-out:

1. Press the **Prefs** soft key, choose **Display**, and then **Menu Auto** back-out.
2. Press the **Select** soft key.

   OR

   Press the **Back** soft key to return to the previous menu.
3. Press the **Up/Down** navigation key to scroll through the screen and choose the required time interval.

   Choose one of the following values:

   - Never
   - 10 min
   - 5 min
   - 2 min
   - 1 min
   - 30 sec
   - 15 sec

   Note:

   The **Never** option turns off Menu Auto back-out.
4. Press the **Select** soft key to configure the Auto back-out time to the selected (highlighted) value and return to the Display menu.

   OR

   Press the **Back** soft key to dismiss the Auto back-out time menu and return to the Display menu.

Note:

When you enter the Auto back-out menu, the current configuration for the Menu Auto back-out time is pre-selected (highlighted) on the list.

When you press the **Select** soft key, the time interval is flagged to commit to the configured preferences (done after the idle screen is displayed), and is used for menu auto back-outs from that point forward.

Selecting a ring pattern

You can use the ring pattern feature to select the ring pattern for an incoming call.

To select the ring pattern for an incoming call:

1. Press the **Prefs** soft key, select **Audio**, select **Tones**, and then select **Ring Pattern**.
2. Press the **Up/Down** navigation key to scroll through and highlight the different ring patterns displayed on the LCD screen.
3. Press the **Select** soft key to configure the ring pattern and return to the **Tones** menu.

   OR

   Press the **Test** soft key to briefly play the selected ring pattern.

   OR

   Press the **Back** soft key to keep the existing configurations and return to the previous menu.

Adjusting the volume

You can adjust the volume of the IP Deskphone for the following:

- Ring Volume
- Handset Volume
- Headset Volume
- Handsfree Volume
- Paging Ring Volume

A sliding scale appears on the LCD screen display when you adjust the volume.

Related topics:

Adjusting the ring volume on page 58
Adjusting the volume of the Handset, Headset, and Handsfree mode on page 58
Adjusting the paging ring volume on page 60

Adjusting the ring volume

You can adjust the ring volume for an incoming call.

To adjust the ring volume for an incoming call:

1. Press the **Prefs** soft key, select **Audio**, select **Tones**, and then select **Alerting Volume**.
2. Press the **Left/Right** navigation keys.

   OR

   Press the **Up/Down** navigation keys.

   OR

   Press the **Volume** fixed keys.
3. Press the **Set** soft key to configure the selected volume and return to the **Tones** menu.

   OR

   Press the **Back** soft key to keep the existing configurations and return to the **Tones** menu.

Adjusting the volume of the Handset, Headset, and Handsfree mode

You can adjust the volume for the handset, headset, and the handsfree speaker of the IP Deskphone.

To adjust the Handset volume:

1. Press the **Prefs** soft key, select **Audio**, select **Voice**, and then select **Handset**.
2. Press the **Left/Right** navigation keys.

   OR

   Press the **Up/Down** navigation keys.

   OR

   Press the **Volume** fixed keys.

Note:

To adjust the volume during a call, use only the **Volume +** and **Volume -** fixed keys.

3. Press the **Set** soft key to configure the selected volume and return to the **Voice** menu.

   OR

   Press the **Back** soft key to keep existing configurations and return to the **Voice** menu.

You can adjust the headset volume on the IP Deskphone.

To adjust the headset volume:

1. Press the **Prefs** soft key, select **Audio**, select **Voice**, and then select **Headset**.
2. Press the **Left/Right** navigation keys.

   OR

   Press the **Up/Down** navigation keys.

   OR

   Press the **Volume** fixed keys.

   Note:

   To adjust the volume during a call, use only the **Volume +** and **Volume -** fixed keys.

3. Press the **Set** soft key to set the selected volume and return to the **Voice** menu.

   OR

   Press the **Back** soft key to keep the existing configurations and return to the **Voice** menu.

You can adjust the handsfree mode volume on the IP Deskphone.

To adjust the handsfree mode volume:

1. Press the **Prefs** context-sensitive soft key, select **Audio**, select **Voice**, and then select **Handsfree**.
2. Press the **Left/Right** navigation keys.

   OR

   Press the **Up/Down** navigation keys.

   OR

   Press the **Volume** fixed keys.

Note:

To adjust the volume during a call, use only the **Volume +** and **Volume -** fixed keys.

3. Press the **Set** soft key to set the selected volume and return to the **Voice** menu.

   OR

   Press the **Back** soft key to keep the existing configurations and return to the **Voice** menu.

Adjusting the paging ring volume

You can adjust the ring volume for an incoming paging call.

To adjust the ring volume for an incoming paging call:

1. Press the **Prefs** soft key, select **Audio**, select **Tones**, and then select **Paging Volume**.

   The Paging tone is played at the current volume.

2. Press the **Left/Right** navigation keys.

   OR

   Press the **Up/Down** navigation keys.

   OR

   Press the **Volume** fixed keys.

3. Press the **Set** soft key to configure the selected volume and return to the **Tones** menu.

   OR

   Press the **Back** soft key to keep the existing configurations and return to the **Tones** menu.

Selecting a language

The display is available in multiple languages. A maximum of five languages are accessible through the IP Deskphone. The system administrator determines which languages are available for your IP Deskphone.

To select a language:

1. Press the **Prefs** soft key, and then select **Language**.

   The current language displays.
2. Press the **Change** soft key to change the language.
3. Press the **Up/Down** navigation key to scroll and highlight the desired language (for example, German [Deutsche]).
4. Press the **Select** soft key to save the desired language and return to the previous screen.

   OR

   Press the **Back** soft key to keep the existing configurations and return to the **Preferences** menu.

Selecting the date and time format

Several date and time formats are available. Formats are based on the 12-hour and 24-hour clocks.

To select a date format:

1. Press the **Prefs** soft key, select **Misc Options**, and then select **Time**.
2. Press the **Change** soft key.
3. Press the **Up/Down** navigation key to highlight **Date Format** in the menu.
4. Press the **Change** soft key to change the **Date Format**.
5. Press the **Up/Down** navigation key to scroll and highlight either a month/day (MM/DD) or a day/month (DD/MM) format.
6. Press the **Select** soft key to save the format and return to the **Time Format** menu.

   OR

   Press the **Back** soft key to keep the existing configurations and return to the **Time Format** menu.

You can select a time zone for your IP Deskphone.

To select a time zone:

1. Press the **Prefs** soft key, select **Misc Options**, and then select **Time**.
2. Press the **Change** soft key.
3. Press the **Up/Down** navigation key to highlight **Timezone** in the menu.

4. Press the **Change** soft key to change the Date Format.
5. Press the **Up/Down** navigation key to scroll through and highlight the time zones.

   Note:

   Time zones are listed based on GMT format, for example:

   - GMT -11:00 Samoa
   - GMT -10:00 Hawaii
6. Press the **Select** soft key to save the time zone selection and return to the **Time Format** menu.

   OR

   Press the **Back** soft key to keep the existing configurations and return to the **Time Format** menu.

You can select the time zone format for your IP Deskphone.

To select a time format:

1. Press the **Prefs** soft key, select **Misc Options**, and then select **Time**.
2. Press the **Change** soft key.
3. Press the **Up/Down** navigation key to highlight **Time Format** in the menu.
4. Press the **Change** soft key change the date format.
5. Press the **Up/Down** navigation key to scroll and highlight a time format:
   - 12-hour
   - 24-hour
   - French
6. Press the **Select** soft key to save the time format and return to the **Time Format** menu.

   OR

   Press the **Back** soft key to keep the existing configurations and return to the **Time Format** menu.

Chapter 7: Making a call

This section describes the methods you can use to make a call. You can make a call from your IP Deskphone using one of the following:

- Making a call using off-hook dialing
- Making a call using on-hook dialing

You can also initiate a call while using one of the following features:

- The Address Book
- Call Inbox
- Instant Messaging

When an outgoing call fails to connect to the destination, one of the following messages appears:

- `Declined, Temporarily unavailable`
- `Declined, Cannot find user`

Making a call using off-hook dialing

To make a call using off-hook dialing:

1. Make a call by using one of the following off-hook dialing methods:
   - Press the **Line** feature key
   - Lift the handset
   - Press the **Headset** fixed key
   - Press the **Handsfree** fixed key

   The IP Deskphone produces a dial tone.
2. You can make a call using one of the following methods:

   Enter the phone number or SIP address by using the dialpad.

   Note:

   The **abc/123** soft key toggles between alphabetic and numeric input.

   OR

   Press the **Redial** soft key to dial the last dialed number.

Note:

The **Redial** context-sensitive soft key only appears if a number or address was previously entered.

OR

Press the **Msgs** soft key and then select **Voice Mail** from the **Messages** menu to access your voice mail.

OR

Press the **Speed dial** feature key that you programed to call with a commonly used or important phone number or SIP address.

Note:

You can program a feature key to use as a shortcut to dial a number or a SIP address. For more information, see Feature keys on page 110.

3. Press the **Send** soft key to immediately initiate the call.

Note:

The IP Deskphone automatically initiates a call shortly after you enter the SIP address or phone number.

Making a call using on-hook dialing

You can make a call by using on-hook dialing. Enter the SIP address or the phone number before going off-hook.

Note:

When you use this method, you cannot toggle between alphabetic or numeric input.

To make a call using on-hook dialing:

1. Dial the number or SIP address.
2. Continue the call by using one of the following methods:
   - Press the **line** feature key.
   - Press the **Headset** fixed key.
   - Press the **Handsfree** fixed key.
3. To terminate the call, choose one of the following:
   - Replace the handset into the cradle.
   - Press the **Goodbye** key.

Related topics:

Using handsfree calling on page 65

Using handsfree calling

While on an active call, you can switch between the handset, headset, and handsfree mode.

To end a handsfree call:

Press the **Goodbye** key.

To mute a handsfree call:

1. Press the **Mute** key. The LED indicator lights.

2. Press the **Mute** key again to return to a two-way handsfree conversation.

To switch from the handsfree to handset mode:

Lift the handset.

To switch from the handset mode to handsfree mode:

1. Press the **Handsfree** key. The LED indicator lights with a solid red light.

2. Replace the handset.

To use a headset:

1. Connect the headset to the headset jack.
2. Press the **Headset** key. The LED indicator lights.

3. Press the **Goodbye** key or press the button on the wireless headset, if equipped, to release a call.

To switch from handsfree to headset:

Press the **Headset** key. The LED indicator lights.

Using Call Subjects

You have the option of sending a Call Subject when you initiate a call to a contact. Use this feature to indicate to the contact the reason for the call. The IP Deskphone contact displays a message, such as "**`Weekly report call`**" or "**`Daily status`**" when they receive the call. You can select a subject from a list you create or you can create a new subject.

Note:

The Call Subject feature is not available for all call servers. Contact your system administrator or service provider to determine if this feature is available to you.

Whenever you initiate a call by using off-hook dialing, the **Subject** soft key appears as an option to use. You can select a Call Subject from a list or create a new Call Subject to send.

To enter a call subject from a list:

1. Press the **Subject** soft key to send a Call Subject with the call you are making.

   A list of Call Subjects appears on the LCD screen.
2. Press the **Up/Down** navigation key to highlight the Call Subject you want to use and press the **Select** soft key. The IP Deskphone sends the Call Subject to the contact you are calling.

   OR

   Press the **New** soft key to create a new Call Subject that is not on the list.
3. Press the **abc/123** soft key to toggle between alphabetic and numeric characters.
4. Use the dialpad to enter the Call Subject.
5. Press the **Save** soft key to continue.

   OR

   Press the **Clear** soft key to clear the text.

   OR

   Press the **Back** soft key to return to the previous menu.

   Note:

   When you select a subject from this list, it appears on the screen before you send the call. If you want to change that subject, press the **Subject** soft key to return to the Call Subject menu. You now have the option to select **No** for a Call Subject.

To create a new call subject while initiating a call:

1. Press the **Subject** soft key to send a Call Subject with the call you are making.
2. Press the **New** soft key to create a new Call Subject.
3. Press the **abc/123** soft key to toggle between alphabetic and numeric characters.
4. Use the dialpad to enter the new Call Subject for the contact.
5. Press the **Save** soft key to save the new Call Subject and use it with the call.

   OR

   Press the **Clear** soft key to clear the text.

   OR

   Press the **Back** soft key to return to the previous menu without sending the new Call Subject.

Managing Call Subjects

You can create a list of Call Subjects to have ready to use when you initiate a phone call. The number of Call Subjects that are stored on the IP Deskphone depends on how the IP Deskphone was initially configured. You can modify, delete, and add Call Subjects while the IP Deskphone is in the idle state.

Related topics:

Adding a Call Subject on page 67
Deleting a Call Subject on page 68
Editing a Call Subject on page 68

Adding a Call Subject

You can add a Call Subject while the IP Deskphones is idle.

To add a Call Subject while the IP Deskphone is idle:

1. Press the **Prefs** soft key, select **Feature Options**, and then select **Call Subject** from the menu.
2. Press the **Add** soft key to create new Call Subject.

   Note:

   If the Call Subject list is full, then the option to add a new Call Subject is not available. In this situation, you need to delete a Call Subject before you can add the new Call Subject.

3. Press the **abc/123** soft key to toggle between alphabetic and numeric characters.
4. Use the dialpad to enter the new Call Subject.
5. Press the **Save** soft key to add the new Call Subject.

   OR

   Press the **Back** soft key to return to the previous menu without adding a new Call Subject.

Deleting a Call Subject

You can delete a Call Subject while the IP Deskphone is idle.

To delete a Call Subject while the IP Deskphone is idle:

1. Press the **Prefs** soft key, select **Feature Options**, and then select Call Subject from the menu.
2. Press the **Up/Down** navigation key to scroll through and highlight the Call Subject to delete.
3. Press the **Delete** soft key to delete the selected Call Subject.

   A confirmation screen appears with the question, `Delete call subject?`
4. Press the **Ok** soft key to confirm the deletion of the Call Subject.

   OR

   Press the **Back** soft key to not delete the Call Subject and return to the previous menu.

Editing a Call Subject

You can edit a Call Subject while the IP Deskphone is idle.

To edit a Call Subject while the IP Deskphone is idle:

1. Press the **Prefs** soft key, select **Feature Options**, and then select **Call Subject** from the menu.
2. Press the **Up/Down** navigation key to scroll through and highlight the Call Subject to edit.
3. Press the **Edit** soft key to edit the selected Call Subject.
4. Press the **abc/123** soft key to toggle between alphabetic and numeric characters.

5. Use the dialpad to edit the Call Subject.
6. Press the **Save** soft key to confirm the changes.

   OR

   Press the **Back** soft key to return to the previous menu without editing the Call Subject.

Chapter 8: Receiving a call

When you receive a call, you are typically notified by the alerting ring, and the incoming caller identification appears on the LCD screen. The incoming call forces the screen to exit active menu activities and takes precedence over a pop-up Instant Message (IM).

Caller identification

When you receive an incoming SIP call, the Caller ID information appears on the IP Deskphone display screen. When you receive a call from a contact that is entered in the IP Deskphone Address Book, the caller information appears as it is in the Address Book.

You can restrict the information displayed for incoming calls or for calls you make by configuring the privacy settings..

When you receive an incoming call, you can do one of the following:

- Answer an incoming call.
- Redirect an incoming call.
- Ignore an incoming call.
- Receive an intercom call.
- Receive paging calls.

Answering an incoming call

When you can answer an incoming call, you can choose one of four methods.

To answer an incoming call:

1. Press the **Answer** soft key that activates a Handsfree call.
2. Lift the handset.
3. Press the **Headset** fixed key.

4. Press the **Handsfree** fixed key.

Redirecting an incoming call

When you receive a call, you can choose to redirect the call to another destination without answering the call.

To redirect a call, press the **Redrct** soft key. To enter a SIP address or phone number where you want the call redirected, use one of the following methods:

- Enter the SIP address or phone number by using the dialpad.
- Select a contact from the Address Book or Call Inbox.

To redirect an incoming call by using the dialpad:

1. Press the **Redrct** soft key to redirect an incoming call.

   The LCD screen prompts you to enter an address to which you want the call directed.

2. Use the **Dialpad** to enter a phone number or SIP address.

   Note:

   Do not use the # key to end dialing when you redirect a call. The call returns a busy signal and does not connect.

3. Press the **Redrct** soft key.

   OR

   Press the **Clear** soft key to clear the entry.

   OR

   Press the **Back** soft key to return to the **Incoming Call** screen without redirecting the call.

To redirect a call by using the Address Book or Call Inbox:

1. Press the **Redrct** soft key to redirect an incoming call.
2. To select a SIP address to redirect the call, do one of the following:
   - Press the **Directory** fixed key to choose a SIP address from the Address Book.

- Press the **Msg/Inbox** fixed key to choose a SIP address from the Call Inbox.

3. Press the **Up/Down** navigation key to highlight a SIP address contact.
4. Press the **Select** soft key to select the highlighted SIP address.

   OR

   Press the **Back** soft key to return to the previous screen.
5. Press the **Redrct** soft key to redirect the incoming call to the selected address.

Ignoring an incoming call

You can terminate an incoming call alert without answering the call by pressing the **Ignore** soft key or by pressing the **Goodbye** fixed key. The caller continues to hear the ringing tone but is unaware that you are ignoring the call.

You can configure the **Call Ignore** feature to either Local or Network. When Call Ignore is configured to Local, only that IP Deskphone is affected, and it stops ringing when you press the **Ignore** soft key. When Call Ignore is configured to Network and you press the **Ignore** soft key, the IP Deskphone stops ringing, and a message is sent to the network indicating that you are busy at all SIP IP Deskphones you are logged on to, and that server should stop trying to contact you.

To configure the Ignore feature to Local or Network press the **Prefs** soft key, select **Feature Options**, and then select **Call Ignore Action** from the menu. Press the **Change** key to change the Call Ignore setting to either **Call Ignore: Local**, or **Call Ignore: Network**.

Note:

When you are on active call and you receive an incoming call, do not press the **Goodbye** fixed key to ignore an incoming call. If you press the **Goodbye** fixed key, the current call disconnects. Press the **Ignore** soft key to ignore the incoming call.

To ignore an incoming call:

1. Press the **Prefs** soft key, select **Feature Options**, and then select **Call Ignore Action** from the menu.
2. Press the **Change** key to change the Call Ignore setting to either **Call Ignore: Local** or **Call Ignore: Network**.
3. Press the **Ignore** soft key to terminate an incoming call.

   OR

   Press the **Goodbye** fixed key when you are not on an active call.

Chapter 9: The Address Book

The Address Book is a personal directory of contacts from which you can make a phone call or send an Instant Message (IM). You can access the Address Book while on a call and start a new call from the highlighted contact. You can use the Address Book for the following:

- Viewing the Address Book on page 75
- Initiating a call from the Address Book on page 75
- Adding a contact to your Address Book on page 76
- Editing a contact in your Address Book on page 77
- Copying information to the Address Book
- Searching for a contact in the Address Book on page 79

Viewing the Address Book

To access the Address Book, press the **Directory** fixed key or press the **View** soft key, and then select **Address Book** from the menu.

To view information about a contact, use the navigation button to highlight a name, and then press the **View** soft key. The name, SIP address, and designation of the contact as Friend or not is displayed.

When you view the details of a contact, you can:

- Initiate a call from the Address Book to the contact..
- Send an IM.
- Edit the contact information.

Initiating a call from the Address Book

You can initiate a call directly from your IP Deskphone Address Book.

Note:

If your service provider requires that a Directory Number (DN) be used to initiate a call, the Address Book entry must have the DN to initiate a call.

First, go off-hook. If needed, you can add a Call Subject.

You can also access the Address Book while on an active call and initiate a new call. The IP Deskphone automatically places the active call on hold when you initiate a new call.

To initiate a call to a contact stored in the Address Book:

1. Press the **Directory** fixed key to select a contact from the Address Book to call.
2. Press the **Up/Down** navigation key to highlight a contact on the list.
3. Press the **View** soft key to open the contact information..
4. Press the **Call** soft key to make a call to the contact.

   OR

   Press the **Back** soft key to return to the off-hook screen.

Adding a contact to your Address Book

You can add a new contact to the Address Book of the IP Deskphone.

To add a contact to your Address Book:

1. Press the **Directory** fixed key.

   OR

   Press the **View** soft key, select **Address Book** from the menu, and then press the **Add** soft key.
2. Press the **abc/123** soft key to toggle between alphabetic and numeric characters.
3. Use the dialpad to enter a name for the new contact and press the **Next** soft key to continue.

   OR

   Press the **Back** soft key to return to the previous menu.
4. Use the dialpad to enter a phone number or SIP address (URI) for the new contact. Press the **Next** soft key to continue or press the **Back** soft key to return to the previous menu.
5. Press the **Yes** soft key to designate the contact as a friend.

   OR

   Press the **No** soft key if you do not want to designate the contact as a friend.
6. Press the **Yes** soft key to add the contact to a group and then select the group.

   OR

Press the **No** soft key if you do not want the contact added to a group.

OR

Press the **Back** soft key to return to the previous menu.

7. Press the **Ok** soft key to complete the entry and return to the Address Book menu.

Editing a contact in your Address Book

You can edit a contact in your Address Book.

To edit a contact in your Address Book:

1. Press the **Directory** fixed key.
2. Press the **Up/Down** navigation key to highlight the contact you want to edit, and then press the **View** soft key.
3. Press the **Edit** soft key to edit the contact information.
4. Press the **abc/123** soft key to toggle between alphabetic and numeric characters.
5. Use the dialpad to enter new information for the contact.
6. Press the **Next** soft key to continue.

   OR

   Press the **Back** soft key to return to the previous menu.

   Note:

   If you only need to change one field for the contact, press the **Next** soft key without making changes.
7. Press the **Yes** soft key to designate the contact as a friend and return to the address menu screen.

   OR

   Press the **No** soft key if you do not want a contact designated as a friend and return to the address menu screen.

   Note:

   If the contact is already designated as a friend. then the question

   `Remove from friends?`

appears. Press the **Yes** soft key to remove the contact from your friends list or press the **No** soft key to keep the contact in your friends list.

8. Press the **Ok** soft key to complete the entry and return to the previous menu.

To delete a contact from your Address Book:

1. While in the Address Book, press the **Up/Down** navigation key to highlight the contact you want to delete and press the **View** soft key.
2. Press the **Edit** soft key to access the contact information.
3. Press the **Delete** soft key to completely delete the contact from the Address Book.
4. Press the **Ok** soft key to confirm.

   OR

   Press the **Back** soft key to return to the previous menu.
5. Press the **Ok** soft key to complete the procedure and return to the Address Book.

Copying information to the Address Book

To copy information from the **Call Inbox** screen to the Address Book, use the **Copy** fixed key.

Note:

If you press the **Copy** fixed key while in idle mode, the message

```
No content selected for copying
```

appears on the screen. This message does not appear when an IM pop-up appears.

To copy a contact to the Address Book:

1. Press the **Up/Down** navigation key to highlight the contact in the Call Inbox that you want to add to your Address Book and press the **Copy** fixed key.

   A new screen appears offering the following destinations for the contact information:

   - 1. Address Book
   - 2. Speed Dial Key
   - 3. Send IM Key
   - 4. Call Forward Key
2. Press the **Up/Down** navigation key to highlight the Address Book and press the **Select** soft key.
3. Press the **abc/123** soft key to toggle between alphabetic and numeric characters.

4. Use the dialpad to enter a name for the entry.
5. Press the **Next** soft key to continue.

   OR

   Press the **Back** soft key to return to the previous menu.

   Note:

   If you do not need to change the name for the contact, press the **Next** soft key.
6. Use the dialpad to enter a new phone number or new SIP address for the contact.

   Press the **Next** soft key after each entry to continue or press the **Back** soft key to return to the previous menu.
7. Press the **Yes** soft key to designate the contact as a friend.

   OR

   Press the **No** soft key if you do not want to designate the contact as a friend.
8. Press the **Yes** soft key to add the contact to a group and then select the group.

   OR

   Press the **No** soft key if you do not want the contact added to a group.

   OR

   Press the **Back** soft key to return to the previous menu.
9. Press the **Ok** soft key to complete the entry and return to the Address Book menu.

Searching for a contact in the Address Book

When you access the IP Deskphone Address Book you can perform a search for a contact using one of the following methods:

- Index Search (performs a search based on the index number you enter).
- 1st Character Search (performs a search based on the first character you enter; not case-sensitive).
- Name Search (performs a search based on the name you enter; not case-sensitive).

To change the method the IP Deskphone uses to search:

1. Press the **Prefs** soft key, and select **Misc Options > Search Method**.
2. Press the **Change** soft key.

3. Press the **Up/Down** navigation key to highlight the Search Method you want to use as the default when you search for a contact:
   - Index Search
   - 1st Character Search
   - Name Search
4. Press the **Select** soft key to select a search method, and then return to the previous menu.

You can search for a contact that is in your IP Deskphone Address Book (Local Search) or for a contact in a directory that is stored on the call server (Global Search). You can save a contact name and SIP address found on the call server to your personal Address Book stored in your IP Deskphone.

Related topics:

Using the Search feature in the Address Book on page 80

Using the Search feature in the Address Book

To search for a contact while accessing your personal Address Book, use the dialpad to enter the search information. For example:

- Index Search — to search for a contact by using the Index Search method, enter the index number. When entering an index number larger than 9, you must enter the next digit quickly to move to that item on the list. For example, if the address you need is item 28 on the list, you must enter the digit 8 quickly after entering the digit 2. The found contact is highlighted and then opened.
- 1st Character Search — searches records by ony one character. To search for a contact whose name begins with a letter, for example the letter d, press the d (3) key on the dialpad. The first entry in the Address Book that begins with the letter d appears.
- Name Search — to search for a specific name in your personal Address Book, enter the name by using the dialpad. You can enter a maximum of 8 characters.

Note:

1st Character Search and Name Search are not case-sensitive.

You can search for a contact that is in your IP Deskphone Address Book (Local Search) or for a contact in a directory that is stored on the call server (Global Search). You can save a contact name and SIP address found on the call server to your personal Address Book stored in your IP Deskphone.

Related topics:

Using Local Search on page 81
Using Global Search on page 82

Using Local Search

You can search for a contact that is stored in your Address Book.

To search for a contact stored in your Address Book:

1. Press the **Services** fixed key, select **Search**, and then select **Local Search** from the menu.
2. Press the **Up/Down** navigation key and then press the **Select** soft key to choose a search criteria:
   - User Name
   - Name
   - Phone Number
3. Press the **abc/123** soft key to toggle between alphabetic and numeric characters.
4. Use the dialpad to enter the search information for the contact.

   Press the left arrow to delete characters; press the right arrow to enter a space.

   Note:

   The search is not case-sensitive.
5. Press the **Search** soft key.

   OR

   Press the **Back** soft key to return to the previous menu.

   Note:

   When the search is unsuccessful, the following message appears:

   `No entries found for <search criteria>.`
6. If a search result is successful, you can do one of the following:
   - Press the **Up/Down** navigation key to highlight a contact, from the search result and press the **Call** soft key to initiate a call.
   - Press the **Search** soft key to start a new search.
   - Press the **Exit** soft key to return to the idle screen.
7. If a search result is not successful, you can do one of the following:
   - Press the **Search** context-sensitive soft key to return to the search menu and begin a new search.
   - Press the **Exit** context-sensitive soft key to return to the idle screen.

Using Global Search

You can perform a Global Search for a contact.

To perform a Global Search for a contact:

1. Press the **Services** fixed key, select **Search**, and then select **Global Search** from the menu.
2. Press the **Up/Down** navigation key and then press the **Select** soft key to choose a search criteria:
   - User Name
   - First Name
   - Last Name
   - Phone Number
3. Press the **abc/123** soft key to toggle between alphabetic and numeric characters.
4. Use the dialpad to enter the search information for the contact.

   Press the left arrow to delete a character; press the right arrow to enter a space.

   Note:

   The search is not case-sensitive.
5. Press the **Ok** soft key.

   OR

   Press the **Back** soft key to return to the previous menu.

   Note:

   When the search is unsuccessful, the following message appears:

   `No entries found for <search criteria>.`
6. When a search result is successful, you can do one of the following:
   - Press the **Up/Down** navigation key to highlight a contact from the search result and press the **Call** soft key to initiate a call.
   - Press the **Save** soft key to save the caller information to the Address Book.

   A confirmation screen appears. You can edit the name you save in the Address book. Press the **Save** soft key to accept the entry. Press the **Yes** soft key or the **No** soft key to designate whether the new entry is a friend. The phone saves the entry to the Address Book and returns you to the Inbox screen.
7. Press the **Search** soft key to start a new search.

   OR

Press the **Back** soft key to return to the previous screen.

8. When a search result is not successful, you can do one of the following:
   - Press the **New** soft key to return to the search menu and begin a new search.
   - Press the **Back** soft key to return to the previous screen.

Chapter 10: Call Inbox

While your IP Deskphone is active, all incoming calls are saved in your Call Inbox. You can view the following details about each call:

- Call status (Missed)
- Name of the caller
- SIP address
- Time of the call
- Call Subject (if the caller sends a Call Subject)

You can configure the filter on your Call Inbox to display all incoming calls or missed calls. You can access your Call Inbox while the IP Deskphone is idle or while you are on a call.

Accessing the Call Inbox

You can access the Call Inbox and initiate a call when the IP Deskphone is:

- idle
- active

Managing calls in the Call Inbox while not on a call

You can manage calls in the Call Inbox while you are not on a call.

To manage calls in the Call Inbox while not on a call:

1. Press the **Msg/Inbox** fixed key.
2. Press the **Up/Down** navigation key to highlight a call from the list of calls in your Call Inbox.

   Note:

   You can initiate a call to the highlighted caller.
3. To place a call to the selected address using the primary login of the IP Deskphone, press the **Enter** key.

OR

To view the details of a highlighted call, press the **Right** navigation key. .

OR

To leave the detail view and return to the main Inbox screen, press the **Left** navigation key.

Press the **Missed** soft key to toggle the view filter from the **All** soft key to the **Missed** soft key.

The **All** soft key is displayed when the view mode is on **Missed**, and displays all the calls in the Call Inbox.

OR

Press the **Delete** soft key to delete the highlighted call or all calls in your Call Inbox.

OR

Press the **Exit** soft key to exit the Call Inbox.

The following table provides a list of additional user interactions for the main Call Inbox screen.

Table 13: Additional user interactions

Function
Use the **Enter** key to place a call to the selected address using the primary login of the IP Deskphone. The **Enter** key has the same behavior as the **Call** soft key.
Use the **Dial pad** to select an item by index.
To place a call to the address of the selected call log entry from the primary logged in user of the IP Deskphone, do one of the following: • Lift the handset. • Press the **Headset** fixed key. • Press the **Handsfree** fixed key.
Press the **Line** key to place a call to the address of the selected call log entry from the user logged in on the selected line key.

Viewing the details of a call in the Call Inbox

To view details of a call in the Call Inbox:

Select the call in the Call Inbox and press the right navigation key.

When you view the details of a call in the Call Inbox, you can Initiate a call to the caller displayed on the screen. Press the **Enter** key to place a call to the selected address using the primary login of the IP Deskphone.

Press the **Prev** soft key to select and display he details of the previous entry in the call log.

Press the **Next** soft key to select and display the details of the next entry in the call log.

Press the **Back** soft key to leave the detail view and return to the main inbox screen.

Managing missed calls

When you do not answer incoming calls, the number of new calls appears on the IP Deskphone display screen. For example, if you miss three calls, the following message appears:

```
3 new calls
```

Note:

When you view a missed call in your Call Inbox, the New Call message no longer appears on the telephone display screen. The new calls are stored as missed calls.

To view missed calls:

1. Press the **Msg/Inbox** key and press the **Missed** soft key.
2. Press the **Up/Down** navigation key to highlight a call from the list of missed calls.
3. Press the **Right** soft key to view the details of the missed call.

   Note:

   You manage the missed call the same as any call that is in your Call Inbox.
4. To view all the calls in the Call Inbox, press the **All** soft key.
5. To delete the highlighted missed call or all missed calls, press the **Delete** soft key.

   Note:

   The IP Deskphone deletes only the missed calls from the Call Inbox.
6. To exit the Inbox and return to the idle phone screen, press the **Exit** soft key.

Related topics:

Missed Calls Notification on page 88

Missed Calls Notification

You can change the call log behavior so that the message `xx new calls` is cleared by entering the Inbox without having to select each missed call.

Changing the Missed Calls Notification behavior:

1. Press the **Prefs** soft key.
2. Select **Feature Options**, then **Missed Calls Notification**.
3. Press the **Select** soft key.

   OR

   Press the **Back** soft key to abort the changing of the configurations and return to the Message Options screen.

   If you press the **Select** soft key, one of the following messages appears (based on the current setting of the option):

   - `Press Manual to change Missed Call Notification Message clearing mode`
   - `Press Auto to change Missed Call Notification Message clearing mode`
4. Press the **Auto** soft key to change the clearing mode for the`xx new calls` missed call message for the IP Deskphone.

   Note:

   Auto means that the message is cleared from the idle screen as soon as you enter the Inbox.

   OR

   Press the **Manual** soft key to change the clearing mode for the `xx new calls` missed call message for the IP Deskphone.

   Note:

   Manual means that the message is cleared from the idle screen only after you look at the call detail for every newly missed call in the Inbox.

Initiating a call from the Call Inbox

When you receive a call that is missed or answered, the calling number is listed in the Inbox. You can select the number, and then dial from the Inbox, or you can edit the number in the Inbox.

To initiate a call from the Call Inbox, press the **Msg/Inbox** fixed key and select **Inbox** from the menu.

Note:

- If your service provider requires that a Directory Number (DN) be used to initiate a call, the Call Inbox entry must have the DN to initiate a call.
- While you are on a call, you can initiate a new call from the Call Inbox.

To initiate a call from the Call Inbox:

1. Press the **Msg/Inbox** fixed key.
2. Press the **Up/Down** navigation key to highlight a call from the list of calls in your Call Inbox.
3. To view details of the call, press the **Right** navigation key.
4. To place a call to the selected address, do one of the following:
   - Lift the handset.
   - Press the **Headset** fixed key.
   - Press the **Handsfree** fixed key.

Deleting calls in your Call Inbox

When you delete calls from the Call Inbox, both missed calls and answered calls are deleted. When you view the missed calls and select **Delete**, only the missed calls are deleted.

To delete calls from your Call Inbox:

1. Press the **Up/Down** navigation key to highlight a call from the list of calls in your Call Inbox.
2. Press the **Delete** soft key.
3. Select one of the following soft keys:
   - Press the **Yes** soft key to delete the highlighted call.
   - Press the **AllUsr** soft key to delete all the calls from the selected caller.
   - Press the **All** soft key to clear all calls from the Call Inbox.
   - Press the **No** soft key to return to the Inbox.

Accessing the calls in your Call Inbox during a call

You can access the calls in your Call Inbox while you are in an active call.

To access the calls in your Call Inbox during a call:

1. Press the **Up/Down** navigation key to highlight a call from the list of calls in your Call Inbox.
2. Press the **Enter** key to initiate a call to the highlighted caller.

   Note:

   This places the current call on hold, if it is not already on hold.

   OR

   Press the **Exit** soft key to return to the in-call screen.

Chapter 11: Instant Messaging

You can use your IP Deskphone to send and receive an Instant Message (IM). You can access and respond to an IM while on a call. The IP Deskphone beeps when a new IM arrives.

Configuring Instant Messaging

You can configure your IP Deskphone settings to manage an incoming IM.

- Enable or disable the automatic pop-up of a new IM.
- Enable or disable an audible alert on a new IM.

Related topics:

Instant Message automatic pop-ups on page 91
Configuring IM audible alert on page 92

Instant Message automatic pop-ups

You can configure the IP Deskphone to automatically display an incoming new Instant Message (IM) as a pop-up. The IM pops up when the IP Deskphone is idle or while on a call. You can disable the IM pop-up feature.

Note:

An IM pop-up does not occur if you are navigating the IM screens or navigating the menu structure in general. When this exception occurs, the IM goes directly to the IM Inbox.

When an IM pop-up appears you can do the following:

- Press the **View** soft key to view the complete details of the IM.
- Press the **Prev** soft key to skip to a previous IM (if applicable).
- Press the **Next** soft key to skip to the next IM (if applicable).
- Press the **Exit** soft key, the **Goodbye** fixed key, or **Quit** fixed key to exit the IM pop-up screen and return to the idle screen when you are not on a call or return to the In Call screen if the pop-up occurred during a call.

Related topics:

Configuring Instant Messaging pop-ups on page 92

Configuring Instant Messaging pop-ups

You can configure Instant Messaging pop-ups.

To enable or disable automatic pop-up of a new IM:

1. Press the **Prefs** soft key, select **User Settings** > **IM Settings** > **IM Display: On/Off** from the menu.
2. Press the **Up/Down** navigation key to select the user (if multiple users are logged into the same deskphone).
3. Press the **Select** soft key
4. Press the **On/Off** soft key to toggle between enabling IM pop-ups or disabling IM pop-ups.

   OR

   Press the **Back** soft key to return to the previous menu.

Configuring IM audible alert

You can configure the IP Deskphone to audibly alert you when a new IM arrives. The IP Deskphone audibly alerts you when the IP Deskphone is idle or while on a call. You can also choose to disable the audible alert of the IM feature.

To enable or disable the audible alerts of a new IM:

1. Press the **Prefs** soft key, select **User Settings**, select **IM Settings**, and then select **IM Audible Alert: On/Off** from the menu.
2. Press the **Select** soft key.
3. Press the **On/Off** soft key to toggle between enabling IM audible alerts or disabling IM audible alerts.

   OR

   Press the **Back** soft key to return to the previous menu.

Composing an Instant Message

When you compose an IM, enter the address of the recipient and then enter the message. When you reply to an Instant Message, the IP Deskphone automatically enters the address. You can also send an IM directly from the Address Book.

To compose and send an Instant Message:

1. Press the **Msgs** soft key, select **Instant Messaging**, and press the **New IM** soft key

   OR

   Access the list of IMs by pressing the **Expand** fixed key.

   

   OR

   To compose an IM from the Address Book, select an address and press the **Send IM** soft key.
2. Press the **abc/123** soft key to toggle between numeric and alphabetic input.
3. Use the dialpad to enter the address of the contact.
4. Press the **Next** soft key to continue.

   OR

   Press the **Back** soft key to return to the previous menu.
5. Use the dialpad to enter the content of the message.
6. Press the **Send context-sensitive** soft key to send the IM to the contact.

   OR

   Press the **Back context-sensitive** soft key to return to the previous menu without sending the new IM.

Instant Message Inbox/Outbox

The IM Inbox contains a list of all incoming and outgoing Instant Messages. You can filter the IM list to track a series of correspondence to a contact. An icon indicates the status of the IMs in your Instant Message Inbox/Outbox as follows:

Unread	
Read	
Replied to	
Sent/forwarded	

Related topics:

Accessing Instant Messages on page 94

Accessing Instant Messages

You can access and view the contents of the Instant Message Inbox/Outbox.

To access and view the contents of the Instant Message Inbox/Outbox:

1. Press the **Msgs** soft key, and then select **Instant Messaging** from the menu.

   OR

   Press the **Expand** fixed key.

   

2. Press the **Up/Down** navigation key to highlight an IM from the list of Instant Messages in your IM Inbox/Outbox.

   Note:

   When you want to view only IMs from a specific contact, press the **User** soft key to filter all IMs based on the IM that you highlight. The telephone display screen shows the list of all IMs from that contact.

3. Press the **View** soft key to view the details of the sender, followed by the message content.

   OR

   Press the **New IM** soft key to compose a new IM.

   OR

   Press the **Back** soft key to return to the idle screen.

Viewing the content of an Instant Message

When you view the content of an Instant Message, you can do the following:

- reply to the Instant Message.
- initiate a call to the contact.
- delete the Instant Message.

Related topics:

Replying to an Instant Message on page 95
Initiating a call from an Instant Message on page 95
Deleting an Instant Message on page 96

Replying to an Instant Message

You can reply to an Instant Message.

To reply to an Instant Message:

1. Press the **Reply** soft key to send an IM in response to the IM you are viewing.
2. Press the **abc/123** soft key to toggle between numeric and alphabetic input.
3. Enter the message you want to send as a reply.
4. Press the **Send** soft key to send the IM when it is complete.

   OR

   Press the **Back** soft key to return to the previous menu and not send the IM.

Initiating a call from an Instant Message

To initiate a call from the IM Inbox, press the **Expand** fixed key or press the **Msgs** soft key, and then select **Instant Messaging** from the menu.

Note:

If your service provider requires that a Directory Number (DN) be used to initiate a call, you cannot initiate a call from an Instant Message.

To initiate a call from an Instant Message:

1. Press the **Msgs** soft key, and then select **Instant Messaging** from the menu.

   OR

   Press the **Expand** fixed key.

   

2. Press the **Up/Down** navigation key to highlight an IM from the list of Instant Messages.
3. Press the **View** soft key to access the IM.
4. To initiate a call to the contact who sent the IM, press the **Call** soft key.

The IP Deskphone goes off-hook and initiates the call.

Deleting an Instant Message

To delete a single IM, all the IMs from one contact, or all the IMs in your IM Inbox:

1. Press the **Msgs** soft key, and then select **Instant Messaging** from the menu.

   OR

   Press the **Expand** fixed key.
2. Press the **View** soft key.
3. Press the **Delete** soft key to clear all IMs from the IM Inbox/Outbox.

   OR

   Press the **Back** soft key to return to the previous screen.

Chapter 12: Active calls and call features

This chapter provides information on active calls, and on call features available to the IP Deskphone user.

Active calls

You can use the following features during an active call:

- Making a new call
- Placing a call on Hold
- Using 3-way calling
- Transferring a call

You can use the **Action** soft key to perform the following actions during an active call:

1. New Call—to begin a new call while other calls are on hold.
2. Release Call—to release (hang-up) the selected call.
3. Transfer Call—to transfer the call to another phone number or SIP address.

FNE/FAC features

Access to certain Aura features is provided through dialing Feature Extension Numbers (FNEs) or Feature Access Codes (FACs).

To simplify the use of these features, you can configure speed dial keys for FNEs and FACs. This enables a feature to be easily accessed by pressing a speed dial key on the IP Deskphone instead of dialing an entire FNE or FAC code

Making a new call

You can initiate a new call during a current call. If you do not place the current call on hold first, the IP Deskphone automatically places the current call on hold when you initiate a new call. You can initiate a new call by using any of the following methods:

- Initiating a call using the active call context-sensitive soft key menu.
- Initiating a call from the Address Book.
- Initiating a call from the Call Inbox.

Ring Again Busy / Automatic Callback

Using the Ring Again Busy/Automatic Callback (ACB) feature, internal users who place a call to a busy or an unanswered internal telephone can be called back when the called telephone becomes available.

Upon placing a call and hearing a busy signal, activate the Automatic Callback feature and disconnect the call. The system monitors the called party. When the called party becomes available to receive the call, the system automatically initiates the Automatic Callback call. You hear priority ringing. Lift the handset, and the called party receives the same ringing that the system provided on the originating call.

To activate Ring Again Busy / Automatic Callback:

1. If you hear a busy tone after placing a call to an internal telephone, terminate the call.
2. Dial the Ring Again Busy / Automatic Callback FAC/FNE provided to you by your administrator.

   You hear a confirmation tone.
3. When the called number is free, your IP Deskphone rings. Answer the call and you are connected to your called party.

Whisper Page

Use the Whisper Page feature to send a page to a contact while they are on an active call. With you use the Whisper Paging feature, only the person on the paged extension can hear the page. Other parties on the call cannot hear the page, and you cannot hear anyone on the call. If the paged user has a display telephone, the paged user can see who makes the whisper page.

To create a Whisper page

1. Dial the Whisper Page FAC provided to you by your system administrator.
2. Dial the number to which you want to send the Whisper Page.

   All parties, including you, hear the Whisper Page tone, but only the party to whom the page was sent hears the page itself. You cannot hear either of the parties in the active call.

Call Waiting

When you are on an active call and you receive an incoming call, you are notified of the incoming call by a message on the telephone display screen and a notifying beep. Answering the new call places the active call on hold. You can also redirect the new call, transfer the new call, or ignore the new call.

Placing a call on Hold

Use the Hold feature when you are talking to one contact and want to perform another action, such as answer a new incoming call, transfer a call, or initiate a new call. You can have a number of calls on hold at the same time.

To place a call on hold:

1. Press the **Hold** fixed key.

The LCD on hold icon flashes beside the line on hold.

To retrieve a call on hold:

Press the **Line** feature key beside the flashing LCD indicator.

OR

Press the **Hold** fixed key.

To release a call on hold:

Important:

You must retrieve a call from hold before you can end it.

1. Retrieve the call on hold:
   - Press the **Line** feature key beside the flashing LCD indicator.

     OR

   - Press the **Hold** fixed key.
2. Press the **Goodbye** fixed key.

Related topics:

Multiple calls On Hold on page 100

Multiple calls On Hold

When you have more than one call on hold, use the navigation key to highlight a call on the telephone display screen. You can perform an action with that call by using the soft keys on the In-call menu list. The soft keys displayed vary, depending on the type of call that is currently selected.

When you highlight a call that is not active, you can retrieve the call from on hold and make it active by pressing the **Activate** soft key. You can also join the call with the active call to create a 3-way calling session. .

Multiple calls In-call mode

When the IP Deskphone has multiple calls connected at the same time, you can access the menu items listed in the following table.

Note:

The **Join** soft key appears when there are multiple calls on the IP Deskphone that can be joined for a conference call or 3-way calling.

Table 14: Context-sensitive soft keys for the multiple calls In-call display screen

Soft key label	Function
Join	Press the **Join** soft key to join the eligible calls.
New Call	Press **NewCall** soft key to obtain a dial tone to place another call. The **NewCall** soft key is used to make a conference call. This key behaves like the **Conf** soft key.
Audio/Actvate	Press the **Audio** soft key to change the audio codec and monitor audio quality. The **Actvate** soft key appears when the highlighted call is not the selected call. Press the **Actvate** soft key to place the current call on hold and activate the call you want to connect to. This soft key is also used to retrieve calls parked against the user. **Note:** The **Actvate** soft key never appears at the same time as the **Audio** context-sensitive soft key
More...	Press the **More…** soft key to select a new menu list of soft keys. When you press the **More…** soft key, a different selection of soft keys appears. • If you press the **More…** soft key once from the first menu list, you access the following soft keys:

Soft key label	Function
	[Trnsfer] [RlsCall] [Join] [More...] • If you press the **More…** soft key from the first menu list twice, you access the following context-sensitive soft keys: **[Conf] [Audio] [New Call] [More…]** • If you press the **More…** soft key from the first menu list three times, you return to the first menu list with the following soft keys. **[Prefs] [Blank] [Blank] [More…]**
When you press the **More.…** soft key for the first time, the following context-sensitive soft keys appear on the menu list.	
Trnsfer	Press the **Trnsfer** soft key to transfer the current call.
RlsCall	Press the **RlsCall** soft key to release or hang up the highlighted call.
Conf	Press the **Conf** soft key to place another call, which can be used for a conference call. This context-sensitive soft key has the same behavior as the **NewCall** soft key.
More...	Press the **More…** soft key to select a new menu list of soft keys. The next available menu list contains the following soft keys: **[Retrve] [Conf] [Prefs] [more…]**
When you press the **More…** soft key for the second time, the following soft keys appear on the menu list.	
Prefs	Press the **Prefs** soft key to display the Preferences menu. The menu items include the following: 1. **Display**—use to adjust the display settings of the LCD screen. 2. **Audio**—use to adjust tones and volume settings. 3. **Feature Options**—use to configure the following: • Feature keys • Call Ignore Action • Call Decline Reason • Call Subjects • Call Fwd Notification • Missed Call Notification • Answer Mode Settings — appears when the Auto Answer Mode is enabled on the IP Deskphone. 4. **Language**—use to change the interface language. 5. **Misc Options**—use to access the following options:

Soft key label	Function
	• Alpha Dialing • Search Method • Incoming Privacy • Outgoing Privacy • # Ends Dialing • Hold Mode: Private • Time 6. **Network**—use to access the following: • Server Settings • Device Settings • Diagnostics • Disable screensaver • Licensing • Lock 7. **User Settings**—use to modify the following: • Call Settings • IM Settings • Voice Mail Settings • Change Location
<blank>	
<blank>	
More...	Press the **More…** soft key to return to the first menu list of soft keys. The next available menu list contains the following soft keys: **[Join] [NewCall] [Audio] [more…]**

To access a call on hold when multiple calls are on hold:

1. Press the **Up/Down** navigation key to highlight a call on hold.
2. Press the **Line** feature key beside the flashing LCD indicator.

   OR

   Press the **Hold** fixed key to retrieve a call on hold.

To make a call on hold the active call:

1. Press the **Up/Down** navigation key to highlight a call on hold.
2. Press the **Actvate** soft key to make the highlighted call on hold the active call.

   This removes the call from on hold and automatically places the previous call on hold.

To release a call on hold:

Important:

You must make a held call the active call before you can release it.

1. Press the **Up/Down** navigation key to highlight a call on hold.
2. Press the **Actvate** soft key to make the highlighted call on hold the active call.

   This removes the call from on hold and automatically places the previous call on hold.
3. Press the **RlsCall** soft key to release or hang up the highlighted call.

Using 3-way calling

When you have more than one call and you want to join the incoming calls into one call, you can use 3-way calling or create a conference call.

Note:

Your system administrator or service provider must enable 3-way calling and conference calls for your IP Deskphone. Contact your service provider or system administrator to determine if this feature is available.

The 3-way Call feature joins two calls on your IP Deskphone into one 3-way call. You and the other two callers can speak together. When you join more than two calls into one call, you must use the conference call feature. Your IP Deskphone manages the 3-way call, and the server manages a conference call. .

To activate the 3-way Call feature:

Press the **Join** soft key with either call, and then select **3-way Call** from the menu.

The IP Deskphone joins the two calls and creates a new call that appears on the LCD screen as `3-way Call]`.

Note:

- If you receive a new call during a 3-way call, you can answer the new call as usual. The IP Deskphone automatically puts the 3-way call on hold. If you want to join the new

caller to a 3-way call, you must initiate a conference call with the server and join all callers to the conference call.

- If the host of a 3-way call presses the **Hold** button, all callers in the 3-way call are put on hold.
- If the host of a 3-way call presses the **Goodbye** fixed key or selects **Release Call** from the **Action** menu, all calls in the 3-way call are terminated.

Ad hoc conferencing when connecting to the Call Server

This feature allows you to make ad hoc conference calls when you connect to the Call Server.

Note:

Your system administrator must enable ad hoc conferencing before you connect to the Call Server.

To create an ad hoc conference with a third party

1. Place the active call on hold.
2. Press the **NewCall** soft key or press the **Conf** soft key.
3. Dial the **Conference on Answer** FNE provided to you by your system administrator.

   Communication Manager confirmation tone is heard.
4. Enter the telephone number of the contact to conference.

   A confirmation tone is heard.
5. When the call is answered, press the line key for the call on hold.

   The conference is established.

Note:

Ad-hoc conference calls are only available to the primary account.

Transferring a call

Note:

- When more than one call is on hold, the call you want to transfer must be the active call.
- The IP Deskphone does not automatically place the call you want to transfer on hold. To prevent the caller from hearing the transfer process, place the caller on hold and then complete the transfer process.

To transfer a call to another telephone:

1. Press the **Trnsfer** soft key while on an active call to access the **Trnsfer** menu.
2. Press the **abc/123** soft key to toggle between numeric and alphabetic input.
3. Enter the phone number or SIP address to which you are transferring the call.

   OR

   Select a contact from the Address Book or Call Inbox by pressing the corresponding fixed key.

   OR

   Highlight a contact from the list and then press the **Select** soft key.
4. Choose one of the following:
   - Press the **Transfr** soft key to connect the calling party.
   - To erase the address you enter, press the **Clear** soft key.
   - To return to the previous screen, press the **Back** soft key.

   If you pressed the **Transfr** soft key, the IP Deskphone prompts you with the following question:

   `Consult with party?`
5. - Press the **Yes** soft key to consult with the contact to which you are transferring the call before completing the transfer.

   OR

   - Press the **No** soft key to transfer the call without consulting the contact to whom you want to transfer the call.

   A `Transferring...` message is displayed.

   Press the **Exit** soft key to close the **Transferring...** dialog.

Your IP Deskphone then displays any local calls, including the transferred call, until `Transfer successful` or `Transfer failed` is displayed, depending on the transfer results.

OR

- Press the **Back** soft key to return to the previous screen.

To transfer an active call to Voice Mail:

1. Press the **Trnsfer** soft key while on a call to access the Transfer menu.
2. Press the **abc/123** soft key to toggle between numeric and alphabetic input and enter the Voice Mail ID, extension, or external number by using the dialpad.
3. Press the **Trnsfer** soft key again.
4. When `Consult with party?` is prompted, choose one of the following:
   - Press the **To VM** soft key to connect the calling party to Voice Mail.
   - To return to the previous screen, press the **Back** soft key.

Note:

- The Transfer to Voice Mail feature is not available for all call servers. Contact your system administrator or service provider to determine if this feature is available to you.
- The Transfer to Voice Mail feature during a conference call is dependent on the call server and is not allowed. If the Secure Digits feature is enabled, and you connect to Voice Mail during an active call, the screen displays only the last pressed key , and the remaining digits appear as '*'.

You can press **Hide** or **Unhide** to hide or display the pressed keys.

Note:

The Transfer to Voice Mail feature is available only when configured by your system administrator.

Using Park Call

You can use the Park Call feature to temporarily park a call to the call server or to a specific user. You or another user can retrieve the parked call from another phone. Using Park Call does not tie up a line, since it is held on the call server.

To park a call to the server during a call:

1. Press the **NewCal** soft key.
2. Dial the FNE of Call Park and press the **Send** soft key.

Note:
The FNE number is provided by your system administrator.

To retrieve a parked call to the same phone:

1. Dial the FNE of Call Retrieve and press the **Send** soft key.
2. Press the **#** key.

To retrieve a parked call to a different phone:

1. Dial the FNE of Call Retrieve and press the **Send** soft key.
2. Enter the extension number the call is parked on.

Call Park and Speed Dial keys

You can program speed dial keys for Call Park and Call Retrieve.

Use **Prefs > Feature Options > Feature Keys > Speed Dial** to program Call Park and Call Retrieve buttons with the appropriate FNE codes.

To park a call using Speed Dial

1. While on the call, press the **Trnsfr** soft key.
2. Press the **Call Park** speed dial button.
3. Press the **No** when prompted with `Consult with Party?`.

   The call is parked and your IP Deskphone phone returns to idle.

To retrieve a parked call using Speed Dial

1. Press the **Call Retrieve** speed dial button.
2. Press **#** if retrieving the call on the same phone the call was parked from. Otherwise, enter the extension number on which the call is parked .

   The call is retrieved and connected.

Using the Friends feature

You can designate a contact you have frequent interaction with as a friend. Access your friends list in the Address Book to:

- Check the presence status of a friend.
- Initiate a call to a friend.
- Send an IM to a friend.
- Edit the information about a friend.

Related topics:

Accessing your Friends list on page 108
Editing information of a friend on page 109

Accessing your Friends list

To check the online status of a friend on your Friends list:

1. Press the **Directory** fixed key.
2. Press the **Filter** soft key, and select **Friends** from the menu.
3. Press the **Up/Down** navigation key to highlight the desired friend and press the **Select** soft key.
4. Press the **Status** soft key to view the current presence status of the friend.
5. Press the **Exit** soft key to return to the idle screen.

To initiate a call to a friend on the Friends list:

1. Press the **Directory** fixed key.
2. Press the **Filter** soft key, and select **Friends** from the menu.
3. Press the **Up/Down** navigation key to highlight the desired friend and press the **Select** soft key.
4. Press the **Status** soft key to view the current presence status of the friend.
5. Press the **Call** soft key to initiate a call to the friend.

   The IP Deskphone uses the SIP address or phone number from your personal Address Book to make the call.

To send an IM to a friend on the Friends list:

1. Press the **Directory** fixed key.
2. Press the **Filter** soft key, and select **Friends** from the menu.
3. Press the **Up/Down** navigation key to highlight the desired friend and press the **Select** soft key.
4. Press the **Status** soft key to view the current presence status of the friend.
5. Press the **SendIM** soft key to send and IM to the friend.

The IP Deskphone uses the SIP address for the contact from your personal Address Book.

6. Use the dialpad to enter the text of the message.
7. Press the **abc/123** soft key to toggle between numeric and alphabetic input.
8. Press the **Send** soft key to send the IM.

   OR

   Press the **Back** soft key to return to the previous menu.

Editing information of a friend

You can edit information of a friend on the Friends list.

To edit information of a friend on your Friends list:

1. Press the **Directory** fixed key.
2. Press the **Filter** soft key, and select **Friends** from the menu.
3. Press the **Up/Down** navigation key to highlight the desired friend and press the **Edit** soft key.
4. Press the **abc/123** context-sensitive soft key to toggle between alphabetic and numeric characters.
5. Use the dialpad to enter a new name for the contact.
6. Press the **Next** soft key to continue.

   OR

   Press the **Back** soft key to return to the previous menu.

   OR

   To remove a contact from the Friends list, press the **Delete** soft key. This completely removes the contact from your personal Address Book.
7. Use the dialpad to enter the new address for the contact.
8. Press the **Next** soft key to complete the process.

   OR

   Press the **Back** soft key to return to the previous menu.
9. If you want to add the contact to a group, press the **Yes** soft key, select the group and press the **Select** context-sensitive soft key to add contact to the group.

   OR

   Press the **No** soft key to return to the previous menu without adding contact to a group.

OR

Press the **Back** soft key to return to the previous menu.

10. Press the **Ok** contact-sensitive key to return to the Friends list. Press the **Ok** contact-sensitive key to return to the Friends list.

To delete a contact from your Friends list:

1. Press the **Directory** fixed key.
2. Press the **Filter** soft key, and select **Friends** from the menu.
3. Press the **Up/Down** navigation key to highlight the desired friend and press the **Edit** soft key.
4. Press the **Delete** key. This completely removes the contact from your personal Address Book.
5. Press the **Ok** soft key to continue.

   OR

   Press the **Back** soft key to return to the previous menu.

Feature keys

Use the Feature key option to configure the feature keys on IP Deskphone and the Expansion Module for Avaya 1100 Series IP Deskphones.

Programmed keys are stored in the user profile. Each user can maintain a list of programmed feature keys. You can designate a feature key to act as a short cut for any of the following features:

- Speed Dial
- Call Forward
- Do Not Disturb
- Send IM
- Presence

The IP Deskphone designates the feature key on the bottom right of the four feature keys as Feature Key 1 and reserves it as the line key for the IP Deskphone.

You can program the feature keys one at a time, or you can automatically program empty feature keys from your Friends list or Address Book.

Feature keys can also be programmed on the Expansion Modules.

Related topics:

Feature key programming on page 111
Remove a programmed feature key on page 116
Feature key autoprogramming on page 116

Feature key programming

You can program feature keys.

To access the Program Key screen:

Press the **Prefs** soft key, select **Feature Options**, and select **Feature Keys** from the menu.

The **Program Key** screen opens .

The **Program Key** screen provides the following soft keys:

- **View**— to access the feature key detail screen.
- **Edit** —to edit the setting or modification of the selected programmable key.
- **Bulk**—to access the autoprogramming and auto removal feature.
- **Back**—to return to the previous screen.

To view feature key details:

1. To select a feature key to view, do one of the following:
   - Press the **Up/Down** navigation key to highlight the feature key to view and press the **View** context-sensitive soft key.
   - Press the **Feature** key that you want to view and press the **View** context-sensitive soft key.
   - Use the dialpad to select the **Feature** key that you want to view and press the **View** soft key.
2. Press the **Back** soft key to return to the previous screen.

The **Program Key** screen displays the following:

- Key—programmed feature key number
- Label—label used for the feature key
- Service—services programmed to the feature key, such as:
  - Speed Dial
  - Call Forward
  - Do Not Disturb
  - Send IM
  - Presence

- User—current user to whom the programmed feature key is associated
- Address—SIP address for the feature key when programmed for Speed Dial, Call Forward, and Send IM.

Note:

If you to try to view a feature key that is not programmed, the IP Deskphone displays the message:

```
Program Key Not Available (Key is empty).
```

To edit a feature key:

1. 1. To select a feature key to edit, do one of the following:
   - Press the **Up/Down** navigation key to scroll through the feature keys to highlight the one you want to edit and then press the **Edit** context-sensitive soft key.
   - Press the **Feature** key that you want to edit and then press the **Edit** soft key.
   - Use the dialpad to select the **Feature** key that you want to view and then press the **Edit** soft key.

   The **Program Key** screen opens.
2. Press the **Back** soft key to return to the previous screen.

To modify a feature key:

1. Press the **Modify** soft key.
2. Press the **Up/Down** navigation key to highlight one of the following feature key services:
   - Speed Dial
   - Call Forward
   - Do Not Disturb
   - Send IM
   - Presence
3. Press the **Select** soft key to choose a service.

   OR

   Press the **Back** soft key to return to the previous menu.
4. Press the **abc/123** soft key to toggle between numeric and alphabetic input.
5. Use the dialpad to enter the label for the feature key.
6. Press the **Next** soft key to continue. Continue to input information based on the following services:
   - Speed dial.
   - Call Forward.

- Do Not Disturb.
- Send IM.
- Presence.

OR

Press the **Back** soft key to return to the previous menu.

To program a Speed Dial feature key:

To program a Speed Dial feature key, beginning from Step 6 in the procedure “To modify a feature key” on page 112:

1. Press the **Select** soft key.
2. Select **Speed Dial**.
3. Press the **Select** soft key.
4. Use the dial pad to enter a key label.
5. Press the **Next** soft key to continue.
6. Use the dial pad to enter an address.
7. Press the **Next** soft key to continue.
8. Use the dial pad to enter a Call Subject associated with the Speed Dial contact. You can leave this blank if you do not want to include a Call Subject.
9. Press the **Ok** soft key to confirm the entry and move to the next step.

   OR

   Press the **Cancel** soft key to return to the previous step.
10. Press the **Yes** soft key to activate auto-retrieve of held call on hang up of speed dial.

    OR

    Press the **No** soft key to return to the previous step.

To program a Call Forward feature key:

To program a Call Forward feature key, beginning from Step 6 in the procedure “To modify a feature key” on page 112:

1. Press the **Select** soft key.
2. Select **Call Forward**
3. Use the dial pad to enter a key label.
4. Press the **Next** soft key to continue.
5. Select a User.
6. Press the **Select** soft key.

7. Use the dial pad to enter the address.
8. Press the **Finish** soft key to confirm the entry and complete the procedure.

   OR

   Press the **Clear** soft key to erase the entry.

   OR

   Press the **Back** soft key to return to the previous menu.

To program a Do Not Disturb feature key:

To program a Do Not Disturb feature key, beginning from Step 6 in the procedure “To modify a feature key” on page 112:

1. Press the **Select** soft key.
2. Select **Do not disturb**.
3. Press the **Select** soft key.
4. Use the dial pad to enter a key label.
5. Select a User.
6. Press the **Select** soft key.
7. Press the **Finish** soft key to confirm the entry and complete the procedure.

   OR

   Press the **Back** soft key to return to the previous menu.

To program a Send IM feature key:

To program a Send IM feature key, beginning from Step 6 in the procedure “To modify a feature key” on page 112:

1. Press the **Select** soft key.
2. Select **Send IM**.
3. Press the **Select** soft key.
4. Use the dial pad to enter a key label.
5. Press the **Next** soft key.
6. Use the dial pad to enter an address.
7. Press the **Finish** soft key to continue.

To program a Presence feature key:

To program a Presence feature key, beginning from Step 6 in the procedure “To modify a feature key” on page 112:

1. Press the **Select** soft key.
2. Press the **Up/Down** navigation key to highlight one of the following:
   - Connected
   - Unavailable
3. Press the **Select** soft key to select **Presence**.

   OR

   Press the **Back** soft key to return to the previous step.
4. You can choose a more detailed message as follows for other users to see or you can select **None** if you do not want to give additional information.
5. You can choose a status from the following:

Appointment	Permanent absence
Away	Playing
Breakfast	Presentation
Busy	Shopping
Dinner	Sleeping
Holiday	Spectator
In transit	Steering
Looking for work	Travel
Lunch	TV
Meal	Vacation
Meeting	Working
On the phone	Worship
Performance	Unknown

Note:

You can create your own Presence message to appear on screen, which become available when you program a feature key as a shortcut.

6. Press the **Finish** soft key to select the **Presence** detail and finish the procedure.

   OR

   Press the **Back** soft key to return to the previous step.

Remove a programmed feature key

You can remove a feature key by using one of the following methods:

- Edit context-sensitive soft keys.
- Bulk context-sensitive soft keys.

To remove a feature key using the Edit soft key:

1. 1. Press the **Prefs** soft key, select **Feature Options**, and select **Feature Keys** from the menu.

   The **Program Key** screen opens as shown in Feature keys on page 110.
2. To select a feature key to remove, do one of the following:
   - Press the **Up/Down** navigation key to scroll through the feature keys to highlight one to remove and press the **Edit** soft key.
   - Press the feature key that you want to remove and then press the **Edit** soft key.
   - Use the dialpad to select the **Feature** key that you want to view and then press the **Edit** soft key.

   The **Program Key** screen opens.
3. Press the **Back** soft key to return to the previous screen.
4. Press the **Remove** soft key.

   The IP Deskphone displays `Confirm Remove key`?
5. Press the **Yes** soft key to confirm the removal of the feature key.

   OR

   Press the **No** soft key to return to the previous screen without removing the feature key.

Feature key autoprogramming

Feature key autoprogramming provides the user with the ability to cause the IP Deskphone to detect all unused programmable keys, and to automatically fill them as Speed Dial keys, Send IM keys, or Call Forwarding keys using the user Friends list or the user Address Book. The feature key autoprogramming also provides the user with the ability to remove all programmed feature keys from the IP Deskphone.

Autoprogramming does not overwrite feature keys already programmed and when the IP Deskphone detects if a feature key is already configured with Speed Dial, Send IM, or Call Forward for contact, it does not create a new instance.

Note:

The autoprogramming feature options are dependent on your service provider and IP Deskphone configuration. If you attempt to use the autoprogram feature (**Bulk** soft key) for a feature that is not available to you, the IP Deskphone displays the message: `This feature is disabled. Contact your provider.`

To autoprogram feature keys:

1. Press the **Prefs** soft key, select **Feature Options**, and select **Feature Keys** from the menu.

   The **Program Key** screen opens.

2. Press the **Bulk** soft key.

   OR

   Press the **Back** soft key to return to the previous step.

3. Press the **Select** context-sensitive soft key to select menu item **1. Feature key creation**.

4. Press the **Up/Down** navigation key to highlight one of the following services that you want to autoprogram:

   - 1. Speed Dial
   - 2. Send IM
   - 3. Call Forward

5. Press the **Select** soft key to autoprogram the feature keys with the selected service.

   OR

   Press the **Back** soft key to return to the previous step.

To remove all programmed feature keys by using the Bulk soft key:

To remove all programmed feature keys, or an individual programmed feature key, by using the Bulk context-sensitive soft key:

1. Press the **Prefs** soft key, select **Feature Options**, and select **Feature Keys** from the menu.
2. Press the **Bulk** soft key.
3. Press the Up/Down navigation key to highlight the **2. Feature key removal** menu item and press the **Select** soft key.
4. Press the **All** soft key to remove all the programmed feature keys.
5. Press the **Yes** soft key to confirm the removal of all the feature keys.

   OR

Press the **No** soft key to return to the previous screen without removing the feature keys.

6. To select a single feature key to remove, do one of the following:
   - Press the Up/Down navigation key to scroll through the feature keys and highlight the feature key to remove and press the **Remove** soft key.
   - Press the **Feature** key that you want to remove and press the **Remove** soft key.
   - Use the dialpad to select the **Feature** key that you want to view and press the **Remove** soft key.

     OR

     Press the **Back** soft key to return to the previous menu.

Remove individual programmed feature keys by using the Bulk soft key:

1. Press the **Prefs** soft key, select **Feature Options**, and select **Feature Keys** from the menu.
2. Press the **Bulk** soft key.
3. Press the Up/Down navigation key to highlight the **2. Feature key removal** menu item and press the **Select** soft key.

   The **Program Key** screen opens listing all the feature keys.
4. To select a single feature key to remove, do one of the following:
   - Press the Up/Down navigation key to scroll through the feature keys to highlight one and press the **Remove** context-sensitive soft key.
   - Press the **Feature** key that you want to remove and then press the **Remove** context-sensitive soft key.
   - Use the dialpad to select the **Feature** key that you want to view and then press the **Remove** soft key.

   OR

   Press the **Back** soft key to return to the previous menu
5. Press the **Yes** soft key to confirm the removal of the feature key.

   OR

   Press the **No** soft key to return to the previous screen without removing the feature keys.

Related topics:

Creating a feature key using the Copy key on page 119

Creating a feature key using the Copy key

You can create a feature key for Speed Dial, Call Forward, or Send IM by pressing the **Copy** fixed key when you are viewing any of the following:

- a highlighted entry in an Address Book list
- a highlighted entry of your Call Inbox

To designate a feature key by using the Copy key:

1. Open your Address Book or Call Inbox, highlight the entry you want to use for the feature key, and then press the **Copy** key.
2. Press the **Up/Down** navigation key to highlight Speed Dial, Call Forward, or Send IM from the menu.

   Note:

   Presence and Do Not Disturb are not programmable by using the **Copy** key.
3. Press the **Select** soft key.
4. Press the **Up/Down** navigation key to highlight the feature key to which to copy the information to and press **Set**.

   OR

   Press the **Feature** key that you want to use for the service selected.
5. Use the dialpad to enter the label for the feature key.
6. Press the **Next** soft key to continue. Continue to input information based on the selected service:
   - Speed Dial
   - Call Forward
   - Send IM
   - Presence

   See Feature key programming on page 111.

   OR

   Press the **Back** soft key to return to the previous menu.

Using Call Forward

Use the Call Forward feature to direct incoming calls to an alternate destination. You can continue to make calls from the IP Deskphone but all incoming calls are redirected to the new destination.

When you forward a call to another IP Deskphone, the IP Deskphone that receives the call displays the name and SIP address (if present) of the caller, the name and SIP address (if present) of the original called party, and any subject message included with the call. This ensures that the user who receives the forwarded call knows that the call is forwarded from you, who the call is from, and any subject message that is included.

Note:

Not all service providers display forwarded calls as described. Contact your system administrator or service provider for more information about Call Forward.

When the address or subject line is long, you can scroll by using the left and right navigation keys.

Call Forward reminder signal

When you forward your calls to another user or IP Deskphone, you have the option to program the IP Deskphone to remind you that incoming calls can be forwarded. This notification is an audible signal you hear when you go off hook and a change to the ring pattern when a call is incoming.

To activate or deactivate this notification:

1. Press the **Prefs** soft key, select **Feature Options**, and select **Call Fwd Notification** from the menu.
2. Press the **On** soft key to activate Call Forward Notification

   OR

   If the Call Forward Notification is activated, press the **Off** soft key to deactivate the feature.

Note:

If the IP Deskphone is ringing or is in Do Not Disturb mode, you cannot forward the call.

Activate Call Forward

To forward your calls or change the number where calls are forwarded:

1. Press the **CallFwd** soft key.
2. Use the dialpad to enter the phone number or SIP address where you want to forward your calls.
3. Press the **Forwrd** soft key to accept the number and return to the Services Menu.

   OR

   Press the **Clear** soft key to clear the input line.

   OR

   Press the **Back** soft key to cancel the input and return to the **Services** menu.

Deactivate Call Forward

To deactivate Call Forward:

Press the **Disable** soft key to deactivate Call Forward and return to the **Services** menu.

OR

Press the **Back** soft key to cancel deactivating the Call Forward and return to the **Services** menu.

Call Forward Unconditional

Call Forward unconditional is used to immediately redirect your calls.

To configure the Call Forward Unconditional number to which calls are to be forwarded, enter the Communication Manager FNE provided by your administrator. To disable Call Forward Unconditional , enter the Communication Manager FNE provided by your administrator

Call Forward Busy and Call Forward No Answer

Use Call Forward Busy to redirect incoming calls to another destination when you are busy on all of your call appearances; the system immediately forwards the call. The system does not cause the telephone to ring before the system forwards the call to another destination.

Use Call Forward No Answer to redirect incoming calls to another destination when you do not answer the call within the allowed time interval. If you do not answer a call, the telephone rings for the allowed time interval. At the end of the interval, the system forwards the call to another destination.

To configure the Call Forward Busy number to which calls are to be forwarded, enter the Communication Manager FNE provided by your administrator. To disable Call Forward Busy , enter the Communication Manager FNE provided by your administrator

Extended Call Forwarding

Extended Call Forwarding allows you to configure the telephone number to which all calls or busy/unanswered calls to a specific phone are to be forwarded.

To enable Extended Call Forwarding for Phone 1:

1. From Phone 2, dial the activation FAC and the extension of Phone 1, followed by #.
2. Enter the security code for Phone 1, followed by #.
3. Enter the forward-to extension (Phone 3).

To disable Extended Call Forwarding for Phone 1:

1. From another phone, dial the deactivation FAC and the extension of Phone 1, followed by #.
2. Enter the security code for Phone 1, followed by #.
3. Enter the forward-to extension (Phone 3).

Remote Send All Calls

The Remote Send All Calls feature allows a telephone user to activate or deactivate Send All Calls for a specified extension from a telephone whose Class of Restriction includes console permissions.

To enable Remote Send All Calls:

1. Dial the Activation FAC.
2. Enter the extension of the target phone followed by .
3. Entere the Station Security Code followed by #.

To disable Remote Send All Calls:

1. Dial the Deactivation FAC.
2. Enter the extension of the target phone followed by .
3. Enter the Station Security Code followed by #.

Configuring Do Not Disturb

Use Do Not Disturb to automatically block all incoming calls. When you activate this feature, the calling party receives a busy signal.

To enable Do Not Disturb

1. Press the **DND** soft key on the idle display (press the **More…** context-sensitive soft key until DND appears).
2. Press the **Enable** soft key to configure the IP Deskphone to Do Not Disturb.

   OR

   Press the **Back** soft key to return to the previous menu.
3. Press the **Ok** soft key to return to the **Services** menu.

To disable Do Not Disturb

1. Press the **Disable** soft key to configure Do Not Disturb.

   OR

   Press the **Back** soft key to return to the previous menu.
2. Press the **Ok** soft key to return to the **Services** menu.

Configuring a Presence state

You can configure a Presence state to enable other users to see information about your availability. You can select from a list of pre-made messages or create a new message to display for your Presence state.

To configure a Presence state:

1. Press the **Presnce** soft key (press the **More…** context-sensitive soft until **Presnce** appears).
2. Press the **Change** soft key to change your current Presence state.

   OR

   Press the **Back** soft key to return to the Services menu.
3. Press the **Up/Down** navigation key to highlight either:
   - Connected
   - Unavailable
4. Press the **Select** soft key to continue to the next screen.

   OR

   Press the **Back** soft key to return to the previous step.

   You can choose a more detailed message for other users to see, or you can select **None** if you do not want to provide additional information.
5. Select one of the following Presence states:
   - Appointment
   - Away
   - Breakfast
   - Busy
   - Dinner
   - Holiday

- In-Transit
- Looking For Work
- Lunch
- Meal
- Meeting
- On The Phone
- Performance
- Permanent Absence
- Playing
- Presentation
- Shopping
- Sleeping
- Spectator
- Steering
- Travel
- TV
- Vacation
- Working
- Worship
- Unknown

Note:

You can create your own Presence messages to appear on screen, which become available when you program a feature key as a shortcut.

The Avaya Aura® Presence Server interworking with the IP Deskphones results in the following:

a. The activities of **Busy**, **On the Phone** and **Away** are displayed on 96xx and One-X Communicator SIP phones on Aura (as icons). The other activities will display on 11xx/12xx phones but not the other Avaya phones.

b. The activity **Unknown** appears as **Offline** on other phones.

c. Idle 11xx/12xx phones appear as an **Offline** icon on the other Avaya phones (for example, 96x1 presence indication).

6. Press the **Select** soft key to select the Presence state and move to the confirmation screen.

   OR

   Press the **Add** soft key to enter a custom note.

OR

Press the **Back** soft key to return to the previous step.

7. Press the **OK** soft key to confirm the Presence state selection.

Related topics:

Adding a new Presence state message on page 125

Adding a new Presence state message

You can add a new Presence state message.

To add a new Presence state message:

1. Press the **Presnce** soft key (press the **More…** context-sensitive soft key until **Presnce** appears).
2. Press the **Change** soft key.
3. Select **Connected** or **Unavailable** from the menu.
4. Press the **Add** soft key.
5. Press the **abc/123** soft key to toggle between alphabetic and numeric characters.
6. Use the dialpad to enter a new Presence state message.
7. Press the **Ok** soft key to confirm the entry and complete the procedure.

   OR

   Press the **Back** soft key to return to the previous step.

Audio Codecs

This feature allows you to specify a codec to which you can switch to during an active call. You can use the Preferences menu to modify the order of preference of the codecs between calls.

You can select an audio codec by name during a call, or while the handset is idle. The Audio Codecs feature also gives you control over the audio configuration that is used for inbound and outbound calls.

To change the codec while on the call, select **Audio** > **Change codec**, and then press **OK**.

The following context-sensitive soft keys are available on the Audio Codes page:

- **Ok** — to view the Audio Codec Selection screen.
- **Back** — to return to the previous screen.

Related topics:

Audio Codec Selection on page 126
Audio Codec Ordering on page 126

Audio Codec Selection

The Audio Codec Selection allows you to select a codec to use during inbound and outbound calls.

The following context-sensitive soft keys are available for selecting the audio codes:

- **Select**: The IP Deskphone attempts to renegotiate the codec for the current call to use the selected codec.
- **Back**: Allows you to return to the Audio Codec screen.

Audio Codec Ordering

The Audio Codec Ordering allows you to modify the order of preference of codecs to use during inbound and outbound calls.

The following context-sensitive soft keys are available for the audio codec ordering page:

- **Save**—to save the current order as the new preferred codec order.
- **MoveUp**—to move the highlighted codec up in the list.
- **MoveDwn**—to move the highlighted codec down in the list.
- **Back**—to return to the Audio Codec screen.

The Audio Codec Ordering screen allows you to modify the order of preference of the codecs. You can reorder the preferences, and the changes to the ordering are saved.

PC Client softphone interworking with the IP Deskphone

An Avaya soft client application such as one-X Communicator or one-X Agent Desktop can create a shared control session with the 11xx/12xx IP Deskphone. To enable shared control, configure the soft client application with option “Outgoing Calls” set to “Desk phone”.

After the IP Deskphone has logged in, log in the soft client application using the same login credentials as the IP Deskphone. The soft client application creates a shared control session with the IP Deskphone. Calls made to and from the PC client use the IP Deskphone’s transducers.

With shared control configured, the following call actions are supported between the PC soft client and the IP Deskphone:

- Answer an incoming call
- Make a call
- End a call
- Ignore a call

For example, dialing a number from the PC soft client takes the IP Deskphone off-hook and dials as if it were the IP Deskphone dialing the call.

Note:

1. During a call, although the one-X device shows the Transfer and Conference keys, you must use the IP Deskphone soft keys to perform these functions.
2. If you have not logged in the IP Deskphone when the PC soft client logs in, the PC soft client displays an error message. Check your IP Deskphone and ensure the IP Deskphone is logged in before logging in the PC soft client.

Automatic remote software updates

Note:

Your system administrator must enable Remote check for update for this feature to work.

Your IP Deskphone may be configured to perform automatic software updates. If this feature is configured, the IP Deskphone displays when a software update is scheduled to occur, and **Yes** and **No** context-sensitive soft keys are displayed. If the IP Deskphone is idle and no key is pressed, the software update begins in one minute.

If you press **Yes**, the software download begins.

If you are using your IP Deskphone (this includes on hold, on a conference call, or when your IP Deskphone is ringing) and you press **No**, the call is not disconnected and the software update does not occur. The IP Deskphone displays the software download prompt again in three minutes a total of three times.

If, after the third notification, you press **No** or no key is pressed, the software update does not occur. Your IP Deskphone attempts the software download process again in two hours.

Note:

If you allow the update to proceed and the server is down, the IP Deskphone does not ask for updates again.

Busy Lamp Field

The Busy Lamp Field (BLF) is an alternate presence-monitoring mechanism for the IP Deskphone that allows presence functionality on proxies that support BLF.

BLF is an icon state for a corresponding Speed Dial key on an IP Deskphone; the icon state tells you if another extension connected to the same SIP server is busy. You do not enable or disable this feature; BLF is configured by your system administrator. If enabled, the IP Deskphone subscribes to the proxy and receives the presence state list for all the users it is configured to watch. Call states and the corresponding presence icons are shown in the following table:

State	Meaning	Icon
Unknown	The presence of the monitored IP Phone is unknown	
Terminated	The monitored IP Phone is not involved in a call and is available	
Ringing	The monitored IP Phone is ringing	Flashing
On the phone	The monitored IP Phone is busy on a call	

Note:

If you have the required permissions, you can answer a call placed to a monitored IP Deskphone. To answer, press the flashing **Ringing** button.

Chapter 13: Advanced features

Viewing the IP Deskphone information

To view the Phone Information for the IP Deskphone, press the **Services** hard key and select **Phone Information** from the menu.

You can view the following information:

- Load Ver
- Software
- E.M Software
- Presence
- FeatActv
- Srv Pkg Location

Press the **Details** soft key to show:

- Primary User
- Primary Domain
- MAC
- IP
- License server
  - Status

Press the **Back** soft key to go back to the **Phone Information** screen.

Note:

You cannot make any changes to the setting from this menu.

To view information about E911, press the **E911** soft key after you access the **Phone Information** screen.

Related topics:

Accessing the Services menu on page 130

Checking for Updates on page 130
Resetting the IP Deskphone on page 131
Erasing the user data on page 132

Accessing the Services menu

Some of the system features require your user password. You must consult with the system administrator or service provider before you can access some of the features.

To access the services menu:

Press the **Services** hard key.

The IP Deskphone displays the following menu:

1. Search	Use to perform local/global search.
2. Login	Use when the call server supports multiple user logons only.
3. Logout	Use to log off the IP Deskphone.
4. Check for Updates	Use to check for the latest software and configuration update for the IP Deskphone.
5. Reset Phone	Use to perform a reset of the IP Deskphone.
6. File Manager	Use to manage files and delete old user data.
7. Logging System	Use to enable/disable SIP logging.
8. Phone Information	Use to view IP Deskphone details.

Checking for Updates

You can check for the latest software and configuration update for your IP Deskphone.

Caution:

You must not request a provisioning update while on an active call because the phone may reboot during processing of the received configuration data. While the phone checks for an update, it activates Do Not Disturb (DND). When the update is finished, DND is deactivated.

To check for the latest update

1. Press the **Services** fixed key.

2. Select **Check For Updates**.
3. Press the **Select** context-sensitive soft key.
4. Press the **Yes** context-sensitive soft key check for the latest software and configuration update for your IP Deskphone.

   OR

   Press the **No** context-sensitive soft key to return to the previous menu without checking for an update.

Resetting the IP Deskphone

Use this feature to log out and reregister to the server.

To reset the IP Deskphone

1. Press the **Services** fixed key, and then select **Reset Phone**.
2. Press the **Select** soft key.
3. Press the **abc/123** soft key to toggle between alphabetic or numeric input.
4. Use the dialpad to enter your password.
5. Press the **Ok** context-sensitive soft key.

   OR

   Press the **Back** soft key to return to the previous menu.

   The IP Deskphone prompts you with

   `Reset Phone?`

6. Press the **Yes** soft key to proceed.

   OR

   Press the **No** soft key to return to the System menu.

7.

Erasing the user data

The IP Deskphone stores user files that you eventually want to delete. These files include:

1. **Profiles** — user profile settings
2. **Sounds** — downloaded tones or audio alerts
3. **Languages** — downloaded language files
4. **Images** — downloaded image files
5. **Logs** — ECR-log file, SIP-log files and its archives.
6. **System file** — IP Deskphone system configuration file (deleting this file returns the IP Deskphone to the factory default configuration settings.)

You can delete some or all of these files. The deletion of files is often necessary when the IP Deskphone is redeployed to a different user.

Note:

Your phone configuration can prohibit you from deleting files. In this case, if you are prohibited from deleting files, the following message appears:

```
Action is not allowed. You don't have permissions.
```

To delete user data files:

1. Press the **Services** fixed key.
2. Select **File Manager**.

   Note:

   You must enter your login password to access the File Manager menu.
3. Press the **abc/123** soft key to toggle between alphabetic or numeric input.
4. Use the dialpad to enter your password.
5. Press the **Ok** soft key.

   OR

   Press the **Back** soft key to return to the previous menu.
6. Press the Up/Down navigation key to highlight one of the following:
   - Profiles
   - Sounds
   - Languages
   - System file

- All files

7. Choose one of the following:
   - To enter the selected folder, press the **Select** soft key.
   - To delete contents of the selected folder, press the **Delete** soft key.

     Note:

     Note: Folders cannot be deleted because they are on the IP Deskphone.
   - If you are at the root folder of the flash disk, press the **Exit** soft key to return to the previous menu.

     If you are already inside the folder, press the **Back** soft key to return to the previous menu.

To delete a user profile:

1. Press the **Up/Down** navigation key to highlight the user profile you want to delete.
2. Press the **Delete** soft key to delete the highlighted user profile from the list.

   OR

   Press the **Back** soft key to return to the previous menu.
3. Log off or restart the IP Deskphone to complete the process.

To delete a sound file:

1. Press the **Up/Down** navigation key to highlight the sound file you want to delete.
2. Press the **Delete** soft key to delete the highlighted sound file from the list.

   OR

   Press the **Back** soft key to return to the previous menu.

To delete a language file:

1. Press the **Up/Down** navigation key to highlight the language file you want to delete.
2. Press the **Delete** soft key to delete the highlighted language file from the list.

   OR

   Press the **Back** soft key to return to the previous menu.

To delete a log file:

1. Press the **Up/Down** navigation key to highlight the log file you want to delete.
2. Press the **Delete** soft key to delete the highlighted log file from the list.

   OR

   Press the **Back** soft key to return to the previous menu.

language

To delete the system file without deleting the user profile:

1. Press the **Delete** soft key to delete the system file from the list.

   OR

   Press the **Back** soft key to return to the previous menu.
2. Log out or restart the IP Deskphone to complete the process.

To delete all files:

1. Press the **Next** soft key to delete the system file and user profilet.

   OR

   Press the **Back** soft key to return to the previous menu.
2. Log out or restart the IP Deskphone to complete the process.

Network menu

In most cases, the system administrator is the only person authorized to access the Network menu and to use an administration password to access the items. For more information on how to access the Network menu items, see *SIP Software for Avaya 1100 Series IP Deskphones - Administration (NN43170-600)*.

The following Network menu items are available:

- **Server Settings** — to select and edit domains
- **Device Settings** — to configure the network settings
- **Diagnostics** — to run a trace route or send a ping to diagnose the network connection
  - IP Set and DHCP information
  - Network Diagnostics tools
  - Ethernet Statistics
  - IP Network Statistics
  - Advanced Diag Tools
  - Test Key
- **Lock Menu** — to access to the Network Menu

To access the Network menu:

Press the **Services** fixed key twice quickly.

OR

Press the **Prefs** soft key, and then select **Network** from the menu.

Note:

You need to enter an administration password to access the **Network** menu items.

Customizable banner for login

If a login banner with login banner text is configured, the IP Deskphone displays the banner text on the screen as the user logs on.

Changing the IP Deskphone-configured language does not change the banner text language. The banner appears only for the primary user of an IP Deskphone. In a multiuser configuration, even when the banner text is enabled, the banner does not appear to the secondary user logins.

Dismiss the banner screen by pressing **OK**. Until you dismiss the banner screen, the IP Deskphone switches to DND mode until the banner is dismissed. Outgoing or incoming calls are not allowed other than emergency calls until you dismiss the banner.

You can see pop-up messages or prompts on the bottom of the banner screen after you dismiss the login banner.

Phone Information - Details screen

The **Phone Information — Details** screen displays the Primary user, Primary domain, MAC address, and IP address of the IP Deskphone. The contents of this screen include user and IP Deskphone identifiable information that may need to be protected (per US Federal/DoD requirements/guidelines).

Note:

To hide information that is protected, the administrator can disable the **Details** context-sensitive soft key on the main **Phone Information** screen.

If the **Details** soft key is disabled, you cannot view details on the **Phone Information - Details** screen.

If the **Details** soft key is enabled, you can view the **Phone Information - Details** screen. In the **Services** menu, select **Phone Information** and then press the **Details** soft key.

The **Phone Information - Details** screen displays the following information:

- **Primary User**: Primary logged-in User name.
- **Primary Domain**: Primary login domain.
- **MAC**: Device MAC address.
- **IP**: IP Deskphone IP Address
- **Device Licensing/Token usage information**: License or token usage information for the IP Deskphone. It is an optional item in the IP Deskphone information.

To dismiss the **Phone Information - Details** screen and return to the previous display, press the **Back** soft key.

Screensaver/screen lock

You can lock the display of the IP Deskphone using a timed Screensaver/ Lock.

When the screensaver is active, it clears the programmed keys of the plugged-in Expansion Module. If you have logged into the IP Deskphone, then you are not logged out, but the line key label clears and makes the IP Deskphone inactive.

The **ScrnSvr** soft key is located on the idle screen. This key is available only if the screensaver has been enabled, and is accessed by pressing the **More…**soft key until **ScrnSvr** appears. Pressing the **ScrnSvr** soft key causes the screensaver timer to turn off, and activates the previously-selected screensaver.

Choose **Prefs > Display > 3. Display Screensaver** to display the **Screensaver** settings screen.

Select **3. Display Screensaver** to display the **Screensaver** settings screen.

The **Screensaver** settings screen allows you to enable or disable your screensaver/lock. You can also configure various settings such as the delay before the screensaver starts and the banner text to display when the screensaver/lock is active.

The following items are displayed:

- **Mode** — to enable or disable the screensaver and choose if the screensaver is to be password protected.
- **Delay** — to configure the time delay before the screensaver is invoked.
- **Text** — to configure the text that appears on the phone display screen when the screensaver is active.

Press **Select** to select the currently highlighted setting.

Press **Back** to exit the **Screensaver** menu.

Mode

The **Screensaver Mode** screen allows you to enable or disable the screensaver/lock.

Choose one of the following screensaver configuration options:

1. **Disable** — to the disable the screensaver.
2. **Enable (no password)** — to enable the screensaver with password-free mode.
3. **Enable (with password)** — to enable the screensaver with password mode.

Press **Select** to select the currently highlighted setting.

Press **Back** to exit the **Screensaver Mode** menu.

Note:

Some options may not appear, depending on configuration.

Disable:

Disabling the Screensaver displays a message confirming your selection.

Enable (no password):

Enabling the screensaver in **No Password** mode displays a message confirming your selection.

Note:

If the device configuration does not allow the use of a password-free screensaver, this menu option is not available to you.

Enable (with password):

Enabling the screensaver in password-protected mode prompts you to enter a password before logging in.

If allowed in the configuration, the user-defined password definition screen is displayed.

The screen displays `Enter user password to activate screensaver` followed by a user-input prompt.

To configure a password:

1. Press the **Set** soft key.

   This soft key appears only if the phone configuration allows the setting of user-defined passwords. Pressing this key invokes a password definition screen that allows you to configure a password.

If a user-defined password is not allowed, then the **Set** soft key is not visible, and you can use only the primary user login password to enable the password–protected screensaver.

2. Enter a password. Press the **abc/123** soft key to toggle input mode between numeric or alphabet.
3. Press **OK**. A `Screensaver enabled` message appears if the password is valid. An `Invalid password` message is displayed if the password is invalid.

Press **Back** to dismiss the **Enable (with password)** mode menu.

Active Screensaver

After the screensaver is enabled, and if the IP Deskphone is idle for the defined delay/time interval, then the screensaver takes control of the IP Deskphone.

If Reboot performed while screensaver is displayed

If you reboot the IP Deskphone when there is an active screensaver:

- If you have enabled autologin, then the screensaver remains active after the IP Deskphone reboots and completes the login.
- If you have not enabled autologin, then the screensaver setting remains enabled, but not active, after you log back into the IP Deskphone manually.

Active Screensaver (no password mode)

Any user interaction, key presses, mouse movement, or incoming call cancels the screensaver (without requiring a user password). This includes pressing the **Unlock** soft key.

Incoming IMs do not cancel the screensaver.

The programmed keys of attached Expansion Module(s) are cleared until the screensaver is deactivated. If you have logged on to the IP Deskphone, you are not logged out, but the line key labels clear and are inactive until the screensaver is deactivated.

Active Screensaver (password mode)

If the screensaver is in a password–protected mode, pressing the **Unlock** soft key invokes a password input screen. The password must be correctly entered to cancel the screensaver.

User interaction, key presses, and mouse movements do not cancel the screensaver.

Pressing the **Unlock** soft key prompts you to enter the password for the screensaver. The primary user line key is displayed (but not active) during the password prompt to give an indication about whose password is in use.

Picking up the handset and dialing digits activates the line function display for emergency calls only. If you try to place an outgoing call, a message is displayed and the screensaver starts again.

If you make an emergency call while the screensaver is active, the call is placed using the primary user.

An incoming call displays caller ID and allows you to answer the call. The **Unlock** soft key appears on the screen and you can unlock the IP Deskphone after answering the call. You

cannot make outgoing calls except an emergency call, and cannot view IMs or the Friends list until you unlock the IP Deskphone.

If you make an emergency call while the screensaver is active, the call is placed using the primary user.

The **Network** menu is accessible to administrators (double press of the Services key) even when the screensaver is active. If user-defined passwords are allowed, a mechanism to disable the screensaver (allowing the administrator to reset the user-defined password) is accessible through the Network menu. This mechanism also invokes remotely from the IP Deskphone console through an SSH connection.

All expansion modules are cleared of programmed keys until the screensaver is deactivated.

Selecting images to be viewed as a slideshow

You can display all of the screensaver images that have been uploaded to your IP Deskphone in a slideshow format.

Images for the IP Deskphone cannot exceed 128 KB. The images must be resized before they are loaded onto the IP Deskphone.

To configure images to be displayed as a slideshow, choose **Prefs > Display > Display Screensaver > Images > Slideshow**.

Service Package Group Support

The Service Package Group Support feature can help you program feature keys on an expansion module. You can view the Group Support feature in the feature key programming user interface and in the Friends list interface of the Address book.

You can use to the Service Package Group Support feature to help you do the following:

- bulk-create feature keys, such as Speed Dial keys, based on one of your existing Directory Address Book groups.
- view existing groups in your address book if you selected Groups as the source data for the bulk key creation.
- view the existing groups you have in your Address Book.
- add a new contact to your Address Book.
- add a new group.

Related topics:

Bulk-create feature keys based on an existing directory Address Book group on page 140
View existing groups in your Address Book if you selected Groups on page 141
View the existing groups you have in your Address Book on page 141
Add a new contact to your Address Book on page 142

Add a new group on page 143

Bulk-create feature keys based on an existing directory Address Book group

To bulk-create feature keys based on an existing directory Address book group:

1. From the idle screen, press the **Prefs** soft key (press the **More…** soft key until you see **Prefs**).
2. Press the Up/Down navigation key to highlight **Feature Option**s, then choose **Feature keys**.

   The main feature key programming screen appears.
3. Press the **Bulk** soft key.

   The **Program Key Bulk** commands screen appears
4. Press the Up/Down navigation key to highlight **Feature key creation**.
5. Press the **Select** soft key.

   The **Create keys** screen appears.
6. Press the Up/Down navigation key to highlight the type of programmed keys you want to create by bulk command.

   You can choose one of the following options:

   - Speed Dial
   - Send IM
   - Call Forward
7. Press the **Select**soft key.

   The **Select Source** screen appears.

   OR

   Press the **Back** soft key to dismiss the screen.
8. Press the Up/Down navigation key to highlight the source data for the bulk key creation.

   You can choose one of the following options:

   - Friends
   - Groups (if you have existing groups in your address book)
   - Address Book
9. Press the **Select** soft key.

   - If you choose **Friends**, the bulk key creation process begins.

- If you choose **Address Book**, the bulk key creation process begins.
- If you choose **Groups**, the **Select Group** screen appears and prompts you to select the specific group you want to use for key creation.

OR

Press the **Back** soft key to dismiss the screen.

View existing groups in your Address Book if you selected Groups

You can view existing groups in your Address Book if you selected Groups as the source data for the bulk key creation.

To view existing groups in your Address Book if you selected Groups:

1. Press the Up/Down navigation key to highlight the source data (group) for the bulk key creation.
2. Press the **Select** soft key to begin the bulk key creation process for the selected group.

   OR

   Press the **Back** soft key to dismiss the screen and return to the screen where you can select the source data for bulk key creation.

Note:

After you select from one of your existing groups, the bulk creation of the keys happens automatically.

View the existing groups you have in your Address Book

To view the existing groups you have in your Address Book:

1. When the IP Deskphone is in the idle mode, press the **Directory** fixed key to access your Address Book.
2. Press the **Filter** soft key to filter the list of entries displayed in your Address Book.

   The **Select Filter** screen appears and displays all the existing groups in your address book, as well as the Friends filter.
3. Press the Up/Down navigation key to highlight the required filter.
4. Press the **Select** soft key to choose the group you want to view (for example, if you choose Personal, only Address Book entries that are part of the group Personal are displayed).

You are presented with the list of contacts currently part of the group you selected.

OR

Press the **Back** soft key to return to the dismiss the screen and return to the main address book screen.

5. Press the Up/Down navigation key to highlight the required entry.
6. Choose one of the following options:
    - Press the **View** soft key to display the address book entry details for the selected entry.
    - Press the **All** soft key to return to the main address book screen (no filtering)
    - Press the **Edit** soft key to modify or delete an entry.
    - Press the **Back** soft key to dismiss the screen and return to the filter selection screen.

After the screen displays the details of the selected Address Book entry, you can do the following:

- Press the **SendIM**soft key to send an IM to the selected entry.
- Press the **Edit** soft key to modify the displayed address book entry.
- Press the **Back** soft key to dismiss the screen and return to the main address book screen.

Add a new contact to your Address Book

To add a new contact to your Address Book:

1. When the IP Deskphone is in the idle mode, press the **Directory** fixed key to access your Address Book.
2. Press the **Add** soft key.
3. Use the dialpad to enter a name for the new contact and press the **Next** soft key to continue.

   OR

   Press the **Back** soft key to return to the previous menu.
4. Use the dialpad to enter a telephone number or SIP address (URI) for the new contact. Press the **Next** soft key to continue.

   OR

   Press the **Back** soft key to return to the previous menu.
5. Press the **Yes** soft key to add the new entry to an address book group.

OR

Press the **No** soft key to add the entry to the address book without adding it to a group.

OR

Press the **Back** soft key to return to the previous menu.

Note:

If you choose to add the new contact to a group, a list of all your existing groups is displayed, and the screen prompts you to select a group.

6. Press the Up/Down navigation key to highlight the required entry.
7. Choose one of the following options:
   - Press the **Select** soft key to assign your new address book entry to the group that you selected.
   - Press the **Edit** soft key to modify the name of an existing group.
   - Press the **Add** soft key to add a new group (invokes the add group screen).
   - Press the **Back** soft key to dismiss the screen and return to the previous screen.

Add a new group

To add a new group:

1. From the **Select Group** screen, press the **Add** soft key.
2. Use the dialpad to enter the group name, and then press the **Ok** context-sensitive soft key.

Note:

If the name of the new group already exists, an error screen appears.

OR

Press the **Back** soft key to return to the previous menu.

Speed Dial List

When configuring the phone provisioning, a feature key can be configured as a Speed Dial List. You cannot modify or delete the feature key used by the Speed Dial List. Also, you cannot modify the content of the Speed Dial List.

Invocation of the speed dial list is similar to other feature key invocation. The Speed Dial List key causes a full screen list to appear and offers you a chance to automatically dial one of the offered choices.

The contents of the Speed Dial List varies, based on the current call state of the IP Deskphone and the type of speed dial list entry configured.

Note:

Only entries in the Speed Dial List can be context-sensitive, not all speed dial keys/ individual feature keys.

A Speed Dial key or one included in a Speed Dial List can cause a call that was placed on hold (when invoked) to be un-held automatically (when call completes), based on a new value that must be configured when a Speed Dial key is created or configured.

A feature key provisioned for use as a Speed Dial List has a similar appearance to all other programmed feature keys on the idle screen (or in-call screen). The label used for the selected key is provided through provisioning.

The following is the icon for the **Speed Dial List** key.

After you press the feature key provisioned as a Speed Dial List, the list of Speed Dial entries configured appears on the screen and the you can select an item from that list to invoke a Speed Dial.

If the Speed Dial List is empty, or results in being empty due to context-sensitive hiding of contents, an error message displays stating `There are no Speed Dials currently available`.

Related topics:

Speed Dial List screen on page 145
Auto-Retrieve flag on page 145

Speed Dial List screen

You can select the provisioned Speed Dial List entries from the **Speed Dial List** screen.

The Speed Dial List screen displays all the Speed Dial List entries provisioned. The displayed Speed Dial List items are based on the provisioned list as well as the current Idle/Mid-call state of the IP Deskphone. After you invoke the Speed Dial List while the IP Deskphone is idle, only Speed Dial List entries that are configured to IDLE are displayed. Similarly, only items marked as MID CALL are displayed if the Speed Dial List is invoked while the IP Deskphone is in a call.

The following are the options available for the Speed Dial List screen:

- **Dial** — invokes the selected speed dial.
- **Exit** — screen dismisses without invoking a Speed Dial List entry.

Auto-Retrieve flag

If you enable the Auto-Retrieve behavior on a Speed Dial key or Speed Dial list entry that is invoked, and place a call on hold to invoke the current key/entry, the IP Deskphone attempts to un-hold the call after the key or entry call completes.

For example:

- A is talking to B when A invokes their Speed Dial List and selects an entry.
- Selection/invocation of a Speed Dial List entry places the A-B call on hold and places an outgoing call to the URI specified in the Speed Dial List entry; for example, C.
- When the A-C call completes, if the Auto-Retrieve flag is enabled for the Speed Dial, then the IP Deskphone attempts to take call A-B off hold. This may not always happen if the IP Deskphone receives another call during the A-C call, or if the A-B call state is changed while A-C is active.

The Auto-Retrieve behavior is added to regular speed dial keys instead of speed dial list entries. To make sure that this flag is configured for programmed speed dial keys, the **Enable Auto-Retrieve** screen appears as the last step in Speed Dial Key configuration.

The Auto-Retrieve screen allows you to configure the Auto-Retrieve behavior for the Speed Dial.

File Manager

You can use File Manager to navigate to the IP Deskphone file system. Access the File Manager menu through **Services > File Manager**.

The following folder names are displayed:

- Profiles
- Sounds
- Languages
- Logs
- System

The following are the options available for the Root screen:

- **Select** — use to enter the selected folder.
- **Delete** — prompts you to delete contents of the selected folder (folders are not deleted because they are on the IP Deskphone).
- **Exit** — If you are at the root folder of the flash disk, the screen is dismissed and you are sent back to the previous menu. If you are already inside a folder, then the **Back** soft key acts the same as the **...** item and moves up one level in the directory structure.

Abbreviated Dialing Lists

Abbreviated Dialing Lists allow you to dial the associated FAC (for example, Abbreviated Dialing List1 Access Code), followed by an index number(for example, 02) specifying which member of the list is to be called. The list can also be modified by dialing the Abbreviated Dial - Prgm Group List Access Code FAC, entering the number of the list (1, 2, or 3), the index of the list to be changed (for example, 05), and the number to be dialed.

Note:

You can program the FAC into a speed dial button for ease of use.

Announcement Record / Listen

This feature allows you to record an announcement associated with an assigned extension.

To record an announcement:

1. Dial the Announcement Access Code FAC provided to you by your system administrator.
2. Dial the extension of the announcement, and a "**1**" to hear confirmation tone to begin recording.
3. To stop recording, hang up the phone.
4. After a one minute pause, dial the announcement extension to listen to the recording.

Change Class of Restriction

The Class of Restriction (COR) for a given extension can be changed using the Change COR Access Code FAC.

Dial the FAC, followed by a system-wide password defined for this purpose, followed by the extension whose COR is to be changed, followed by the COR (for example, 02). The change can be verified by displaying the station form for the extension and examining the COR field.

Change Coverage

The Change Coverage feature allows you to switch between the two call coverage paths defined for your telephone.

Dial the Change Coverage Access Code FAC, the extension of the phone plus #, the Security Code for the phone plus #, and "1" or "2" to change the lead coverage path to Coverage Path 1 or Coverage Path 2 respectively.

EC500 Self Administration

The Extension to Cellular (EC) 500 feature allows you to assign and change the EC500 telephone number associated with your IP Deskphone.

Dial the EC500 Self-Administration Access Codes FAC followed by the IP Deskphone extension number plus #, the IP Deskphone station Security Code plus #, followed by the EC500 telephone number plus #.

This assigns the telephone number and automatically activates EC500. You can also manually activate or deactivate EC500 from a phone by dialing the Enhanced EC500 Activation or Deactivation FAC followed by the desk phone extension plus #, followed by the IP Deskphone station Security Code plus #.

Malicious Call Trace Activation

The Malicious Call Trace Activation feature is initiated from your IP Deskphone to start a trace for a currently active call on a specified extension. All configured trace controller phones on the system are notified of the request and can take control of the trace. The active controller can deactivate the trace. You can can request a malicious call trace, but your IP Deskphone cannot act as a controller.

To make the request, dial the Malicious Call Trace FNE or FAC followed by the extension of the phone that is on the call to be traced. The request can be canceled by dialing the Malicious Call Trace Cancel FNE or FAC.

To initiate Malicious Call Trace on your IP Deskphone

1. To activate Malicious Call Trace for your active call, place the call on hold.
2. Dial the Malicious Call Trace FNE provided by your system administrator.
3. Dial your own extension number.
4. Wait 10 seconds for the confirmation tone.

Note:

You can configure the FNE as a speed dial number.

Station Lock and Unlock

The Station Lock and Unlock feature allows you to restrict calls from being made from a specified extension.

Dial the Station Lock Activation FAC followed by the extension of the target phone plus #, and the station Security Code of the target phone plus #.

When Station Lock is activated, calls dialed from the target IP Deskphone result in a busy tone and the IP Deskphone displays a “Forbidden” message.

To deactivate station lock, repeat the procedure, dialing the Station Lock Deactivation FAC.

Group Call Pickup

With the Group Call Pickup feature, all members in a pickup group can answer a call that is ringing at another group member telephone. If more than one telephone is ringing, the system selects the extension that has been ringing the longest.

One or more pickup groups are created by your system administrator . A pickup group is a collection, or list of individual telephone extensions. A pickup group is the way to connect individual extensions together. A user extension can belong to only one pickup group.

To activate the Group Call Pickup feature on your IP Deskphone, enter the FAC or FNE provided to you by your system administrator.

Chapter 14: Multiuser

The Multiuser feature allows multiple SIP user accounts to be active on the IP Deskphone at the same time. This allows a single IP Deskphone to be shared among multiple users each with their own account, allowing each user to receive calls without logging off other users.

You can have multiple user accounts (for example, a work account and a personal account) active at the same time on the same IP Deskphone.

Initial login

For an initial login, you must enter a user name and password and specify your login to either be permanent or to expire. You can also specify which SIP domain you want to access. The Domain key allows you to select a domain from the configured list but you cannot modify the domains.

You can change the language used at the login screen.

After you are logged in, the IP Deskphone displays the Idle screen.

You can configure up to five profiles. If the limit is exceeded, then the least recently used profile is automatically deleted.

Related topics:

Additional logins on page 151
Automatic login on page 152

Additional logins

The Login command in the System menu allows you to register additional accounts.

Note:

You cannot change the language in a secondary login.

You can specify the Line Key to which the new account is associated. By default, the first unused key is selected. If the configured limit is reached on concurrent logins, then the selected login command displays an error message.

The initial login message `login in process` displays during the login operation.

During the login process, the IP Deskphone can receive calls for user accounts that are already registered; however, other features are not available until the login process is complete.

No profile selection prompt is displayed for the secondary account and no profile is created.

Automatic login

If the automatic login feature is enabled and you were logged in when the IP Deskphone was switched off, the IP Deskphone automatically logs you back in upon startup. If multiple users were logged in, then they are all logged back in one after the other.

If the automatic login feature is disabled, then the automatic login does not occur.

It is possible to provision the IP Deskphone with user credentials for automatic login even on the initial startup. With the addition of multiuser support, it is also possible to provision multiple accounts in the same way. For more information about different autologin scenarios, see Primary account logout on page 152.

Logging out

The logout command prompts you to select an account, asks for confirmation, then proceeds to log out the account. Logging out an account frees the corresponding Line key. Logging out does not require a password.

Related topics:

Primary account logout on page 152
Secondary account logout on page 153

Primary account logout

Logging out of the primary account causes all other accounts to log out automatically and the IP Deskphone to display the login screen. The secondary accounts are logged back in automatically when a new primary account is registered or the same primary account is re-registered.

If the IP Deskphone is restarted after logging out of the primary account, it returns to the login screen. Logging in a new primary account leads to automatic login of secondary accounts.

The list of programmed feature keys is part of the IP Deskphone profile. As a result, logging out of one primary account and logging in on a different account could change the set of feature keys. If a secondary account was assigned to a key that is also in the set of feature keys, the

secondary account takes precedence: it is logged in, and the feature key acts as a Line key. If the account is logged out manually, the programmed feature key becomes available.

Secondary account logout

You can log out of a secondary account by selecting the secondary account in the Logout **Select User** screen. This causes the secondary account to be removed from the autologin list. If you restart the IP Deskphone, the secondary account is not logged back in.

Server failover

If the connection to your account proxy is lost, then the IP Deskphone notifies your account and periodically attempts to reconnect. Some features remain accessible for other accounts (for example, incoming calls), but other features are not available until connection is reestablished or you cancel the re-connection. Cancelling the call has the same effect as logging out. If you are the primary account, the IP Deskphone returns to the initial login screen. If you are logged in on a secondary account, that secondary account is removed from the list of secondary accounts that are logged in on automatic login.

If more than one account loses connection, the IP Deskphone attempts to reconnect the accounts in sequence. The first account to lose connection retries until it re-registers or you cancel the attempt, after which a reconnect attempt begins for the next account. Canceling the re-connection attempt of the primary account immediately abandons attempts for all other accounts, logs out secondary accounts that are still connected, and returns the IP Deskphone to the login screen.

A single login queue is used for automatic logins and failover. This means that if automatic logins are still pending when an account cannot connect, a reconnection attempt for that account only begins after all automatic logins have completed or are cancelled.

Related topics:

Cable unplugged on page 153

Cable unplugged

If the IP Deskphone detects that the network cables are unplugged while accounts were logged in, then the IP Deskphone assumes that all accounts have lost their connection to the server. When you reconnect the cable, the IP Deskphone proceeds to re-register all accounts starting with the primary account.

Upgrade impacts to user profiles

In previous releases of the IP Deskphone software, user profiles were associated to user names rather than accounts; one user profile could be associated with multiple user names. After the IP Deskphone is upgraded to SIP Release 3.x or later software, the IP Deskphone may contain user profiles with old user name associations.

When a primary account with no associated profile is registered, the IP Deskphone looks for an old user profile associated with that user name. If an old user profile associated with that user name is found, the user profile becomes permanently associated with that account and is no longer associated to a list of user names.

Example:

An IP Deskphone with SIP Software Release 2.x has the following user accounts logged in and logged out.

- user1@domain1.com
- user2@domain1.com
- user1@domain2.com

A user profile is created for the first account and is reused for the second account. The third account reuses the same profile, as it has the same user name as the first account.

The IP Deskphone is upgraded to SIP Software Release 4.x.

- A user logs to the primary account “user3@domain1.com”. No profile is found for that account; a new profile is created automatically.
- The user logs out, then logs to the primary account “user2@domain1.com”. No profile is found for that account, but a Release 2.x user profile is found to be associated to the user name “user2”. The profile becomes associated to “user2@domain1.com”. The profile is loaded and user2 now has access to the call logs and most preferences available before the upgrade.
- User2 logs out, then logs in “user1@domain1.com”. User1 had a profile before the upgrade, but that profile has now been associated to the user2 account; therefore a new profile is created.

Not all the information in old profiles is preserved. The preference settings (for example, voice mail ID) are discarded in the upgrade.

Line keys

Each registered user is associated to a separate line key. Each line key displays the name of the registered account and some basic state information for that account.

The primary account is always associated to the first (bottom-right) line key of the IP Deskphone. If you are a secondary user, the order of the next available line key is from bottom to top and right to left on the IP Deskphone, followed by the keys on the Expansion Module from bottom to top and right to left. You can select a different available line key for secondary accounts during the login process

Pressing a line key either brings up a dialing prompt, initiates a call to a pre-selected target, or answers an incoming call.

At **Select Account** prompts (such as the Logout screen and User Settings screen), pressing a line key highlights the corresponding account.

Each line key reflects the state of its account.

- If there is a call for the account, a phone icon shows the state of the call whether it is on hold, or ringing.
- If there is more than one call, the state of the most active call is displayed. Missed incoming calls and new voice mail messages for the account are indicated with an icon. This supplements the **nn missed calls** message on the idle screen and the red LED, which cannot provide per-account information.

Do Not Disturb and Call Forwarding features also affect the appropriate line key icon of the account.

Making a call

You can place a call using any of the registered user accounts. The selected user account determines which proxy is used, which domain name is used for the call target if none was specified, who the target sees is calling, and what service package-dependent features are available.

The ways to initiate an outgoing call fall into two categories:

- always using the primary user’s account
- using a different, explicitly-selected account. The usual way to select an alternate account is to press the line key of that account to obtain a dialing prompt.

If you initiate dialing by pressing digits from the Idle screen, the primary account is used after you lift the handset, press the headset key or press the handsfree key. The same applies if you initiate a call from the Inbox or Instant Messages screen.

Similarly, the primary account is used when a dial prompt is first obtained after you lift the handset, press the handset key, or press the headset key, and the call is initiated by pressing digits from the Idle screen or by pressing the **Send** soft key.

If you initiate a call by pressing a line key, the user account associated with that line key is used when the call is initiated.

If you initiate a call from the Address Book or Friends list, the account that is selected to display the list is the same account that establishes the call.

In all cases, if you initiate the call by pressing a line key, then the account associated with that particular line key takes precedence.

For example, pressing Line Key 1 to obtain a dial prompt, dialing, then pressing Line Key 2 initiates the call using the account associated with Line Key 2. However, there are cases where pressing a Line Key does not initiate dialing (for example, Address Book in Select mode).

While the outgoing call is ringing, the selected account is displayed on screen on a **From:** line.

Receiving a call

When you receive an incoming call, the displayed information shows which account the call is intended to reach. The line key of the corresponding account displays an **incoming call** icon. The call can be answered by:

- pressing the **Answer** context-sensitive soft key
- taking the handset off hook
- pressing the headset or handsfree key
- pressing the appropriate line key of the account

Note:

You cannot use a different account to answer the call.

If the IP Deskphone receives multiple calls at the same time, a list (sorted by the most recent incoming call first) of all active and incoming calls appears. After you select a specific call in the list, you can either answer the call or process the call.

An **incoming-call** icon provides visual feedback. You can answer the call by pressing the line key directly without having to select the call. This automatically puts other active calls on hold.

Being in a call

When a single call is active, the screen displays the local account in use and the remote user. If multiple calls are active, each call appears on a single line. The local account for the active

call appears on the context line. Each line key reflects the most active call state of its account.

The active call is affected by operations such as call transfer or call parking. One exception is the New Call action, which uses the primary account by default; this can be overridden by pressing another line key to initiate the call.

Joining calls into a specific conference always uses the conference server of the primary account. Accounts which cannot access the server cannot join the conference.

After you create an ad-hoc conference, you can join additional calls into the same conference. You cannot create more than one ad-hoc conference at a time.

Three-way calls can join any two calls, regardless of the account. The service package of the account to which a call is associated determines which operations (for example, Call Park) are available on that call. After you have established a 3-way call, the Join functionality becomes unavailable until the 3-way call is terminated.

Instant Messages

Only the primary account can send or receive instant messages. Incoming messages for secondary accounts are rejected; they are not displayed on screen, and are not added to the instant message logs.

Menu features

The IP Deskphone menu displays are customized to match the service package of the active account that is accessing the menu. In most cases, menus are accessed from the Idle screen and the primary account is active. For example, you can only use the **Retrve** context-sensitive soft key to retrieve a parked call if call parking is allowed by the service package of the primary account.

Similarly, accessing the Address Book, either through the corresponding hard key or through the **View** menu, usually displays the Address Book of the primary account. However, accessing the Address Book in select mode (for example, while dialing, or selecting an item for a speed dial key) accesses the address book of the latest user account used on the address-input screen.

Modifying settings

A number of preferences, in particular Voice Mail and IM settings, are per-account. The main **Preferences** menu includes a **User Settings** entry. Selecting this entry prompts you to select a registered account. After selecting an account, a menu appears that lets you modify the settings of that account.

Related topics:

Per-account call notification options on page 158
IM Settings on page 158
Voice Mail Settings on page 158
Remembering settings after logout on page 159

Per-account call notification options

The **Call Settings** entry in the **User Settings** menu provides a number of configuration options relating to how incoming calls for a particular account are treated:

- what kind of audio alert should be used (ring tone, beep, nothing)
- whether the red LED should blink
- whether the call should be added to the Incoming Calls log

IM Settings

IM Settings is located under **User Settings**. Any change in settings on the primary account takes effect immediately. You can also modify settings for a secondary account, but they do not take effect until that account registers as the primary account.

Voice Mail Settings

Voice Mail Settings is located under **Prefs > User Settings**. You can program different voice mail addresses and IDs for each account. To access the voice mail of a secondary account, press the line key of the secondary account to obtain a dial prompt, and then press the **VMail** context-sensitive soft key.

Waiting voice mail messages are reported in two ways:

- The red LED is lit if any account has a waiting message.
- A special icon (a shaded envelope) is displayed on the line key of each account with a waiting message (unless the account is in a call).

Remembering settings after logout

For each profile, up to 24 sets of per-account settings are always remembered. If you have configured settings for an account, after the account is logged out, the settings are restored when the account is logged back in as either a primary or secondary account.

When an account is logged in without settings saved in the profile, a new set of default settings is created for it. If there are already 24 sets of per-account settings in the profile, one setting for which the account is not currently registered is discarded, and the new setting is saved.

Programmable keys

A line key associated with a registered account cannot be used for programmable features. The **Program Key** screen lists all the line keys. All line keys associated with an account are displayed as such, and selecting them displays an error message.

The **Do Not Disturb**, **Call Forward**, and **Presence** keys are associated to a specific user account when they are created, and determine which account's status to affect. For more information see User status on page 161.

By default, you can press a **Speed Dial** programmed key to initiate a call using the primary account. If a line key is pressed to obtain a dialing prompt and then a speed dial key is pressed, the account of the line key is used. When accounts are registered on different domains, you can only program and use speed dial keys with targets that are reachable on the domain of the secondary account. It is possible to program and use speed dial keys with targets that are only reachable on the domain of a secondary account. The Speed Dial keys always uses the primary account to determine the presence state of the target.

Instant Message keys always use the primary account, because IM support is disabled for secondary accounts.

Related topics:

Inbox, Outbox, IM log on page 160

Inbox, Outbox, IM log

There is a single Inbox, a single Outbox and a single Instant Message log for each profile. The detailed view of the call log entry indicates the local account associated to each entry; that is, the source of outgoing calls and the target of received calls.

Call logs and IM logs provide many ways of initiating a call to the address identified by the selected entry, such as lifting the handset. In most cases, the primary account is used. However, if you press a line key to initiate the call, the call uses the account associated with the line key.

If call logs and IM logs are invoked in **Selection** mode; you cannot initiate a call directly. In this case, the **Select** soft key populates a dial prompt or other input field with the selected target. The operation already in progress determines which account to use. For example, if you press the line key to obtain a dial prompt, press the **Inbox** key to select a target, press **Select**, then press **Send**, then the line key that was originally pressed determines the account.

Address books

Each profile contains a local address book, which is independent from all network address books.

Accessing the Address Book in **View** mode (by pressing the Directory hard key from the Idle screen) displays the address book of the primary account. If the primary account does not have a network address book, then the local address book is accessed.

Accessing the Address Book in **Selection** mode always accesses the address book of the current account. For example, after obtaining a dial prompt by pressing Line Key 2, pressing the Directory key accesses the address book of the account associated to Line Key 2. The network-based directory of the appropriate account is accessed only if it is available; otherwise, the local address book is used.

The network-based address book of secondary users can only be accessed in **Selection** mode. You cannot modify the address book of a secondary account on the IP Deskphone. However, modifications made remotely to the address book, such as using a different client or the Personal Agent, are reflected on the IP Deskphone. The local address book is shared by all accounts that do not have a network-based address book.

You can modify the local address book only if the primary account has no network-based address book. Changes to the network-based address book of the primary account are not reflected in the local address book.

The **Friends** view always accesses and modifies the address book of the primary account (local or network-based). There is no selection mode for the Friends view. You can only monitor and view the presence information of Friends of the primary account in Friends view.

User status

This section describes the features associated with the User status.

Related topics:

[Do Not Disturb](#) on page 161
[Presence](#) on page 162
[Call Forwarding](#) on page 163

Do Not Disturb

Selecting the **Do Not Disturb** command from the **Services** menu prompts you to specify which account should be placed in DND mode. The option **all** allows you to place all accounts in DND mode. Selecting an option requests you to confirm the operation before proceeding. The option **all** is highlighted by default.

Activating DND for a specific account automatically causes calls to that account to be rejected with a busy indication; however, calls to other accounts can be received. When DND mode is active for an account, the line key of the particular account periodically displays a DND indicator on its label.

The following scenarios apply to DND:

- If you select a single account and the account is already in DND mode, then you are asked if you want to disable DND rather than asked if you want to enable DND.
- If you select a single account and the account has Call Forwarding active, then an error message appears indicating that DND cannot be activated.
- If you select the option **all** and if at least one account is not in DND mode, then the DND mode is activated for all accounts. If any account is in Call Forward mode, Call Forward is disabled.
- If you select the option **all** when all accounts are in DND mode, DND mode is deactivated for all accounts.

When using a programmed DND feature key, the account that is impacted by the DND feature key is determined when the feature key is configured. When the DND feature key is pressed, the DND feature behavior is the same as previously described, except no confirmation prompt is displayed. The operation is performed immediately, and a message indicating what was done is displayed.

DND mode for each account is persistent. If you restart the IP Deskphone, or log out and log in, the account maintains the original state.

Presence

Selecting the **Presence** soft key prompts you to specify which presence state of the account should be modified. The option all lets you configure all accounts to the same presence in one operation.

If you select a single account, then the current state of the account is displayed and you are prompted whether it should be changed. You are then prompted to enter the new presence state. The new presence state is applied after it is confirmed.

If the option is selected, no current state is displayed, and you are immediately prompted to select the new state. The new state is then applied to all registered accounts.

When using a programmed **Presence** feature key, the account that is impacted by the **Presence** feature key is determined after the feature key is configured.

After a **single** account **Presence** programmed key is pressed:

- If the account is already configured to the programmed presence state, then the account is configured back to the **Connected** presence state.
- If not, the account is configured to the programmed presence state.

After the **all** accounts **Presence** programmed key is pressed:

- If all accounts are already configured to the programmed presence state, then all accounts are configured to the **Connected** state.
- If not, all accounts are configured to the programmed presence state.

As with Call Forwarding keys, this allows Presence keys to be used as toggles.

However, the presence states are not entirely under your control. Some states are applied automatically (for example, On The Phone). All states are applied by sending a message to the SIP proxy, which can choose not to accept the change. As a result, it is possible for a **set all presence** operation to not result in all accounts being configured to the programmed presence. In such a case, pressing the key again would again attempt to apply the programmed presence; therefore it is more effective to program a separate **Presence** key to configure all accounts to the **Connected** state.

Events that update presence states automatically occur on a per-account basis. For example, the **On The Phone** state is applied to any account for which at least one call is active.

Account presence is not retained after logging out or rebooting.

Call Forwarding

Selecting the **Call Forward** command from the **Services** menu prompts you to specify which account must be placed in Call Forward mode. The following is an example of the Call Forward menu:

1. *All accounts*
2. *Disable for all accounts*
3. *mary@abc.com*
4. *bob@abc.com*
5. *alex@abc.com*

The option **All accounts** places all accounts in Call Forward mode in one operation and the option **Disable for all accounts** deactivates Call Forward for all accounts at once.

The following scenarios apply to Call Forward:

- If you activate Call Forward for a specific account, then all calls to the selected account are redirected automatically to the specified address. The target address of the account must be reachable from the domain. Calls to other accounts are still received. The line key label periodically indicates that Call Forward mode is active.
- If you select a single account with neither Call Forward nor DND active, then you are prompted to specify a forwarding target. Call Forward is then enabled. If DND is already active, a message indicating

  ```
  Call Forward cannot be activated
  ```

  displays. If Call Forward mode is already active, then you are prompted whether to deactivate it.
- If you select the **All accounts** option, then all accounts are configured in Call Forward mode using the provided target. DND mode is deactivated for all accounts. If the accounts are already in Call Forward mode for a different target, they are updated to use the new target.
- If you select the **Disable for all accounts** option, the Call Forward feature is deactivated for all accounts for which it is currently active.

When a single user account is selected:

- If the account is already forwarding calls to the programmed target, call forwarding is deactivated.
- If call forwarding is not already activated, then the account is configured to forward calls to the given target, disabling DND if necessary, and overriding any other call forward target that might be active for the account.

For both a single key and the **All accounts** key, you can treat the key as a toggle. If no Call Forward or DND operations are selected, pressing the key switches one or all accounts between forwarding to the key's target and not forwarding states.

The Call Forward state and target for each account is persistent. If you restart the IP Deskphone or logout and login, the Call Forward state is retained.

Notifications

The system displays messages spontaneously on the IP Deskphone screen to report events that are not initiated by you. This includes such events as failure to retrieve a service package and availability of a new Location list.

These spontaneous notifications do not indicate which account is affected by the event. In such cases, the affected account is indicated by the message itself.

It is possible for the same event to occur for multiple accounts at the same time. In this case, they are displayed one after the other.

Account selection

There are a number of scenarios where you are prompted to select an account (for example, logout, per-account settings, programming keys). These scenarios fall into two categories:

1. Prompts where exactly one account must be selected
2. Prompts where an “all” or “none” option is available

In the first case, if you have logged in only one account, then the prompt is not displayed. The single account is selected automatically, and the next screen is immediately displayed. Otherwise, the primary account is always at the top of the list, and is highlighted when the prompt is first displayed.

In all cases, pressing the line key of an account highlights the corresponding item in the account list. If no selection is made in a certain amount of time, then the operation is cancelled.

Index

Numerics

3-way calling 103

A

Abbreviated Dialing Lists 146
Accessing Instant Messages 94
Accessing the calls in your Call Inbox during a call 90
Accessing the Services menu 130
Account selection, multiuser 164
Ad hoc conferencing when connecting to the Call Server 104
add a new contact to your Address Book 142
Add a new group to Address Book 143
Adding a contact to Address Book 76
Adding a new Presence state message 125
Additional logins, multiuser 151
Address Book, add a new contact 142
Address Book, adding a contact to 76
Address Book, call from the 75
Address Book, copying information to 78
Address Book, editing a contact in 77
Address Book, view the existing groups 141
Address Book, viewing 75
Address books, multiuser 160
Advanced features 129
Audio Codec Ordering 126
Audio Codec Selection 126
Audio Codecs 125
Auto-Retrieve flag 145
Automatic login, multiuser 152
Automatic remote software updates 127
Autoprogram feature keys 116

B

Being in a call, multiuser 156
Bulk-create feature keys based on an existing directory Address Book group 140
Bulk, Remove all programmed feature keys by using the Bulk context-sensitive soft key 116
Bulk, Remove individual programmed feature keys by using the Bulk context-sensitive soft key 116
Busy lamp field 128

C

Cable unplugged, multiuser 153
Call Forward reminder signal 120
Call Forward, activate 120
Call Forward, deactivate 120
Call Forward, using 120
Call Forwarding, multiuser 163
call from the Address Book 75
Call Inbox 85
Call Inbox, Accessing the calls during a call 90
Call Inbox, deleting calls 89
Call notification options, multiuser 158
Call notification options, per-account, multiuser 158
Call Park and Speed Dial keys 106
Call Subject, adding 67
Call Subject, deleting 68
Call Subject, editing 68
Call Subjects, managing 67
Call Subjects, using 66
Call Waiting 99
Change Class of Restriction 147
Change Coverage 147
Checking for software updates 130
Checking for updates 130
Class of Restriction, change 147
Codec order 126
Codec, selection 126
Codecs, audio 125
Composing an Instant Message 92
Conferencing, ad hoc 104
Configuring a Presence state 123
Configuring Do Not Disturb 122
Configuring IM audible alert 92
Configuring IM automatic pop-up 91
Configuring Instant Messaging 91
Configuring Instant Messaging pop-ups 92
Configuring the Avaya 1230 IP Deskphone 55
Confirmation logon screen 52
Copy key, creating a feature key using 119
Copying information to the Address Book 78
Creating a feature key using the Copy key 119
Customizable banner for login 135

D

Deactivate Call Forward 120
delete a user profile 132
Delete Friend information 109
delete user data files 132

Deleting an Instant Message 96
Deleting calls in your Call Inbox 89
Display screen icons 32
Do Not Disturb, configuring 122
Do Not Disturb, disable 122
Do Not Disturb, enable 122
Do Not Disturb, multiuser 161

E

EC500 Self Administration 148
Editing a contact in Address Book 77
Editing information of a friend 109
Erasing the user data 132

F

FAC 97
Failed to login user, Authentication required 52
Feature key autoprogramming 116
Feature key programming 111
Feature key, remove programmed key 116
Feature keys 110
File Manager 146
FNE 97
Friend, deleting information 109
Friend, editing information 109
Friends feature 107
Friends list 108

G

Goodbye/Release key 21
Group Call Pickup 149
Group Support 139
Group, add a new group 143

H

handsfree calling 65
Handsfree key 21
Headset key 21
Hold 99
Hold key 21
Hold, access a call on hold when multiple calls are on hold 100
Hold, make a call on hold the active cal 100
Hold, Multiple calls on 100
hookswitch 21

I

Icons, display screen 32
Ignore an incoming call 73
IM audible alert, configuring 92
IM automatic pop-up, configuring 91
IM Settings, multiuser 158
Inbox, Outbox, IM log, multiuser 160
incoming call, ignore 73
incoming call, redirecting 72
Initial login, multiuser 151
Initiating a call from an Instant Message 95
Instant Message automatic pop-ups 91
Instant Message Inbox/Outbox 93
Instant Message, composing 92
Instant Message, deleting 96
Instant Message, initiating a call from 95
Instant Message, replying to 95
Instant Message, viewing the content of 94
Instant Messages, accessing 94
Instant Messages, multiuser 157
Instant Messaging 91
Instant Messaging pop-ups, configuring 92
Instant Messaging, configuring 91
IP Deskphone information, viewing 129

K

Key press behavior 21

L

Line key 21
Line keys, multiuser 154
Location information 54
Logging off from the IP Deskphone 52
Logging out, multiuser 152
logon confirmation 52
logon error messages 52
logout, secondary account 153

M

Making a call 63
Making a call using off-hook dialing 63
Making a call, multiuser 155
Making a new call 97
Menu features, multiuser 157
Message Waiting Indicator 34
missed calls 87
Modifying settings, multiuser 158
Multiple calls On Hold 100
Multiuser 151
Multiuser, account selection 164

Multiuser, additional logins 151
Multiuser, Address books 160
Multiuser, automatic login, ... 152
Multiuser, being in a call 156
Multiuser, cable unplugged 153
Multiuser, Call Forwarding 163
Multiuser, Do Not Disturb 161
Multiuser, IM Settings 158
Multiuser, Inbox, Outbox, IM log 160
Multiuser, initial login 151
Multiuser, Instant Messages 157
Multiuser, line keys 154
Multiuser, logging out 152
Multiuser, making a call 155
Multiuser, menu features 157
Multiuser, modifying settings 158
Multiuser, notifications 164
Multiuser, per-account call notification options 158
Multiuser, Presence 162
Multiuser, primary account logout 152
Multiuser, programmable keys 159
Multiuser, receiving a call 156
Multiuser, remembering settings after logout 159
Multiuser, secondary account logout 153
Multiuser, upgrade impacts to user profiles 154
Multiuser, user status 161
Multiuser, Voice Mail Settings 158
Mute key 21

N

Network menu 134
New call, making 97
Notifications, multiuser 164

P

park a call using Speed Dial 106
Park Call 106
Password protection for domains 47
PC Client softphone interworking with the IP Deskphone 126
Per-account call notification options, multiuser 158
Phone Information - Details screen 135
Placing a call on Hold 99
Presence state messages, adding new 125
Presence state, configuring 123
Presence, multiuser 162
Primary account logout, Multiuser 152
Programmable keys, multiuser 159
Programmed feature key, remove 116

R

Receiving a call 71
Receiving a call, multiuser 156
reconnecting, with multiple logins 153
Redirecting an incoming call 72
Remembering settings after logout. multiuser 159
Remote software updates 127
Remove a programmed feature key 116
Remove all programmed feature keys by using the Bulk context-sensitive soft key 116
Remove individual programmed feature keys by using the Bulk context-sensitive soft key 116
Replying to an Instant Message 95
Resetting the IP Deskphone 131
Retrieve a parked call 106
retrieve a parked call to a different phone 106
retrieve a parked call to the same phone 106
retrieve a parked call using Speed Dial 106

S

Screensaver/screen lock 136
Secondary account logout, multiuser 153
Select User screen 153
Selecting a location 51
Server failover, multiuser 153
Service Package Group Support 139
Services, menu, accessing 130
Software updates, checking for 130
speed dial for FACs and FNEs 97
Speed Dial List 144
Speed Dial List screen 145
Station Lock and Unlock 149

T

Timed logoff while on a call 50
Transferring a call 105

U

Updates, checking for 130
Upgrade impacts to user profiles, multiuser 154
User data, erasing 132
User status, multiuser 161
Using 3-way calling 103
Using Call Forward 120
Using the Friends feature 107

V

View existing groups in your Address Book 141
View existing groups in your Address Book if you selected Groups 141
View the existing groups in your Address Book 141
Viewing the Address Book 75
Viewing the content of an Instant Message 94
Viewing the IP Deskphone information 129
Visual Alerter 34
Voice Mail Settings, multiuser 158

W

While on an active call 97